


- Do not discard packaging until product has been successfully installed.
- Components may be installed in locations other than where shown. Always verify wire harness length.
- While routing, follow factory wiring when possible.
- Use provided dielectric grease on all connections.
- Always consult labels on Harnesses when making connections.
- Avoid rotating or hot components when securing.
- Before drilling any holes, check behind area to be drilled for any interference.



Horn Kit

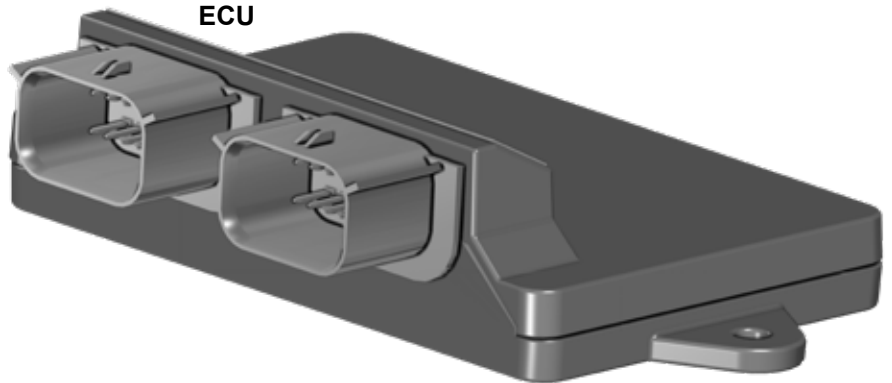

ECU



Turn Signal Switch



Hazard and Horn Switch



Wire Ties



4x - LED Signal

Need help with your installation?



sales@superatv.com



www.superatv.com



1-855-743-3427



8:00am - 8:00pm EST M-Th
8:00am - 7:00pm EST Friday
9:00am - 2:00pm EST Saturday

Read instructions and view illustrations before beginning.

*Thank You
For Choosing*

SUPERATV.COM[®]

route Switch connections to Dash area shown on page 12




(terminal connections are not relevant)
connect to either tab of Horn



to Horn / Hazard Switch

to Turn Signal Switch

to Dash Indicators
(opt)

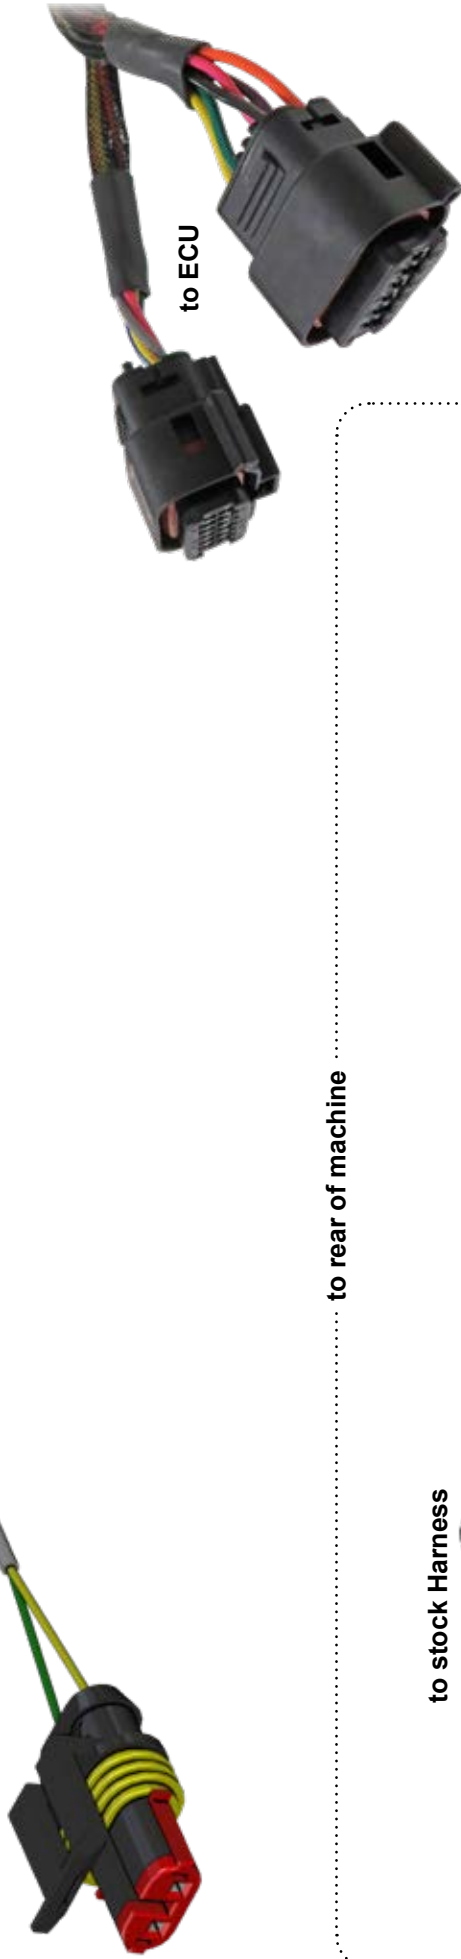

to ECU

to rear of machine

to stock Harness

to Third Brake Light
(opt)

to stock Harness

to License Plate Light
(opt)

to LED's

green and black wires = right
yellow and black wires = left

If License Plate Light and/or Third Brake Light are not going to be used, secure components in a safe location.

CUSTOMER NOTIFICATION AND DISCLAIMER LIABILITY

This product is a modification for utility task vehicles and all terrain vehicles. Use this product at your own risk.

Warranty and Liability Limitations. The Buyer hereby assumes all risks associated with the use and/or installation of this product. Buyer waives all liability claims against SuperATV® of any kind or nature, including, but not limited to, liability for penalties, fines, property damage, personal injury or death, to the fullest extent permitted by law. Buyer acknowledges and agrees that SuperATV® is not liable for any direct, indirect, incidental, consequential or special damages, including but not limited to, damage, loss of life, loss of property or equipment, loss of profits or revenue, injury, or claims from any individual or entity arising from the use of this product.

The warranty for this product, if any, may give you ("Buyer") specific legal rights, and Buyer may also have other rights which may vary from state to state. The installation of this product may void or otherwise adversely affect your factory warranty.

Consult your vehicle warranty before using this Product. Under no circumstances will SuperATV® be liable for the voidance of the Buyer's vehicle warranty. Buyer assumes all risk and responsibility if a manufacturer and/or dealer voids the Buyer's vehicle warranty due to use of this Product.


Safety and Laws. Operate your vehicle at all times in a safe manner. You must abide by all local, state, and federal laws, including but not limited to vehicle safety, traffic laws, and ordinances. It is your responsibility to know the laws and how they apply to you. The installation of this product may violate certain local, state, and federal laws. Be advised that laws vary depending on town, city, county, state, etc. Use of this product on public streets, roads, or highways may be in violation law. The Buyer is solely and exclusively legally and personally responsible for any violation of the law by the installation or use of this product. In no case will SuperATV® be held liable if Buyer violates the law or uses the product in an unsafe manner.

The Buyer is responsible to fully understand the capability and limitations of his/her vehicle according to manufacturer specifications, warnings and instructions and agrees to hold SuperATV® harmless from any damage resulting from failure to adhere to such specifications, warnings and/ or instructions. The Buyer is also responsible to obey all applicable federal, state, and local laws when operating his/her vehicle while using this product, and the Buyer agrees to hold SuperATV® harmless from any violation thereof.

Installation. The installation of this product on your vehicle indicates that you have had the opportunity to inquire about applicable local, state, and federal laws and ordinances and that you have read and understand, and accept all of the terms of, this Disclaimer.

SuperATV® shall not be responsible for the proper installation, use, and service of this product. Rather, the Buyer shall be solely responsible for the installation of the product and any damage that may be done to the vehicle or vehicle components as a result of modifications made by the Buyer.



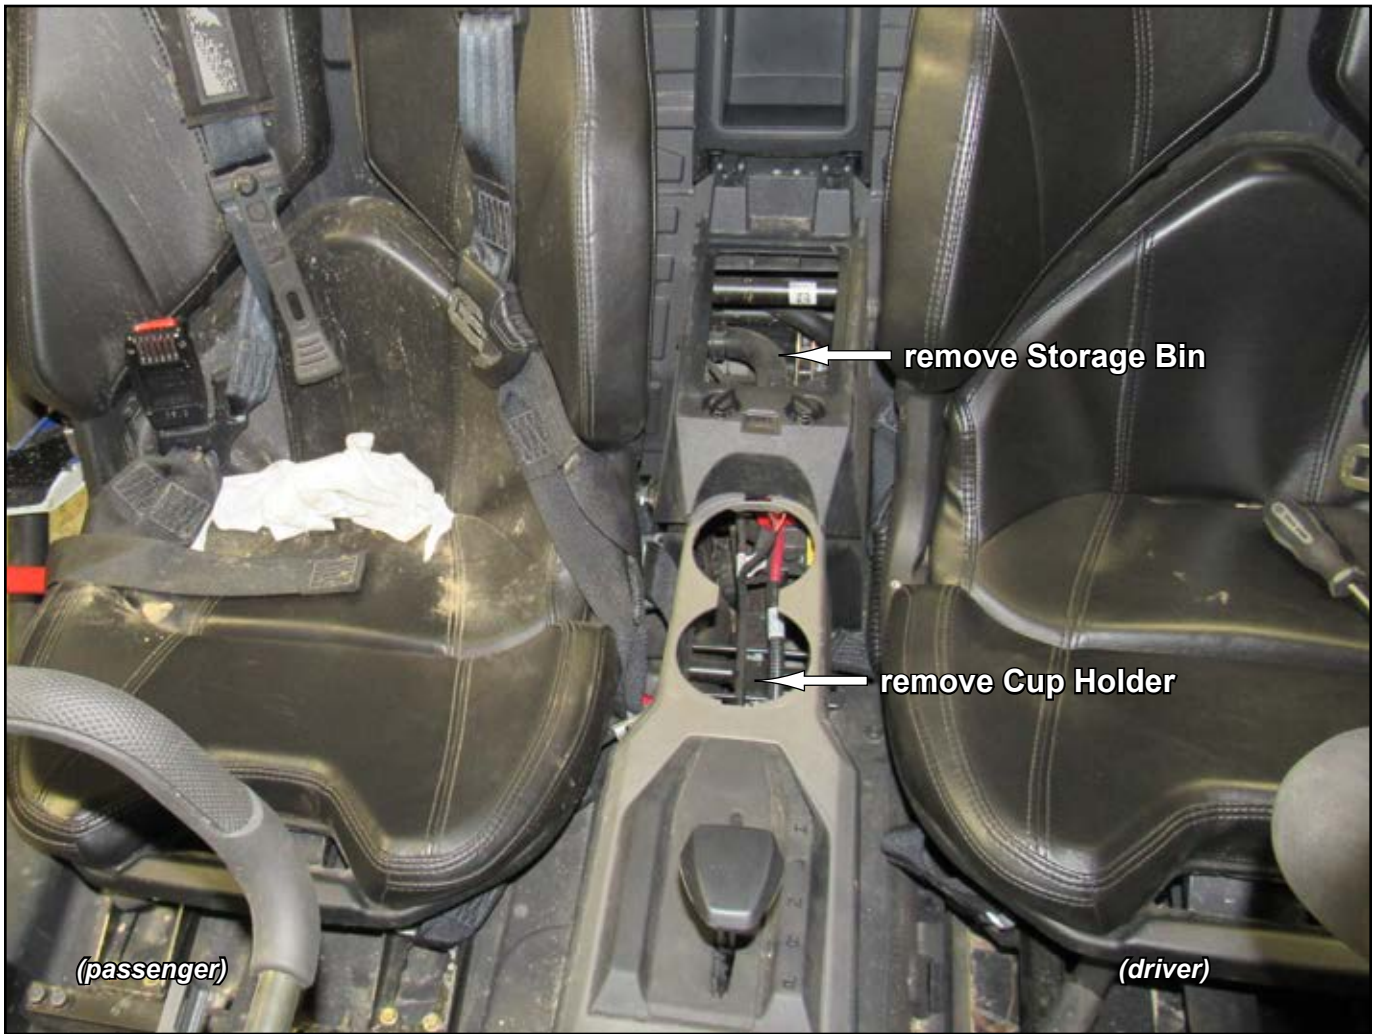

4 seat models require additional removal steps; see pages 13 - 15

Before drilling any holes, check behind area to be drilled for any interference.

LED Signal:


- Drill a Ø3/4" hole in body and install LED Signal. Repeat for remaining LED Signals.
- Plug LED Signals into corresponding inputs on Front Harness.
- Secure all Wires as needed.



If Light is hard to insert separate as shown.

- Separate LED from Gasket.
- Install Gasket into hole.
- Install LED into Gasket.

Gasket

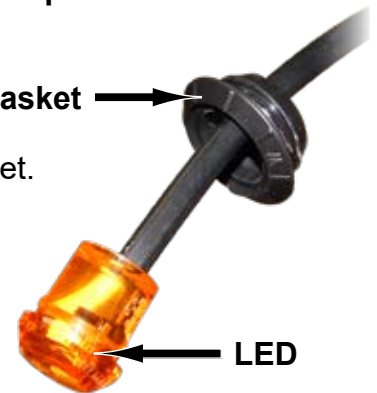


LED

- Connect Harness to ECU.
- Secure ECU to Firewall with hardware shown; tighten.



- Connect Harness to Horn and install Horn to machine.

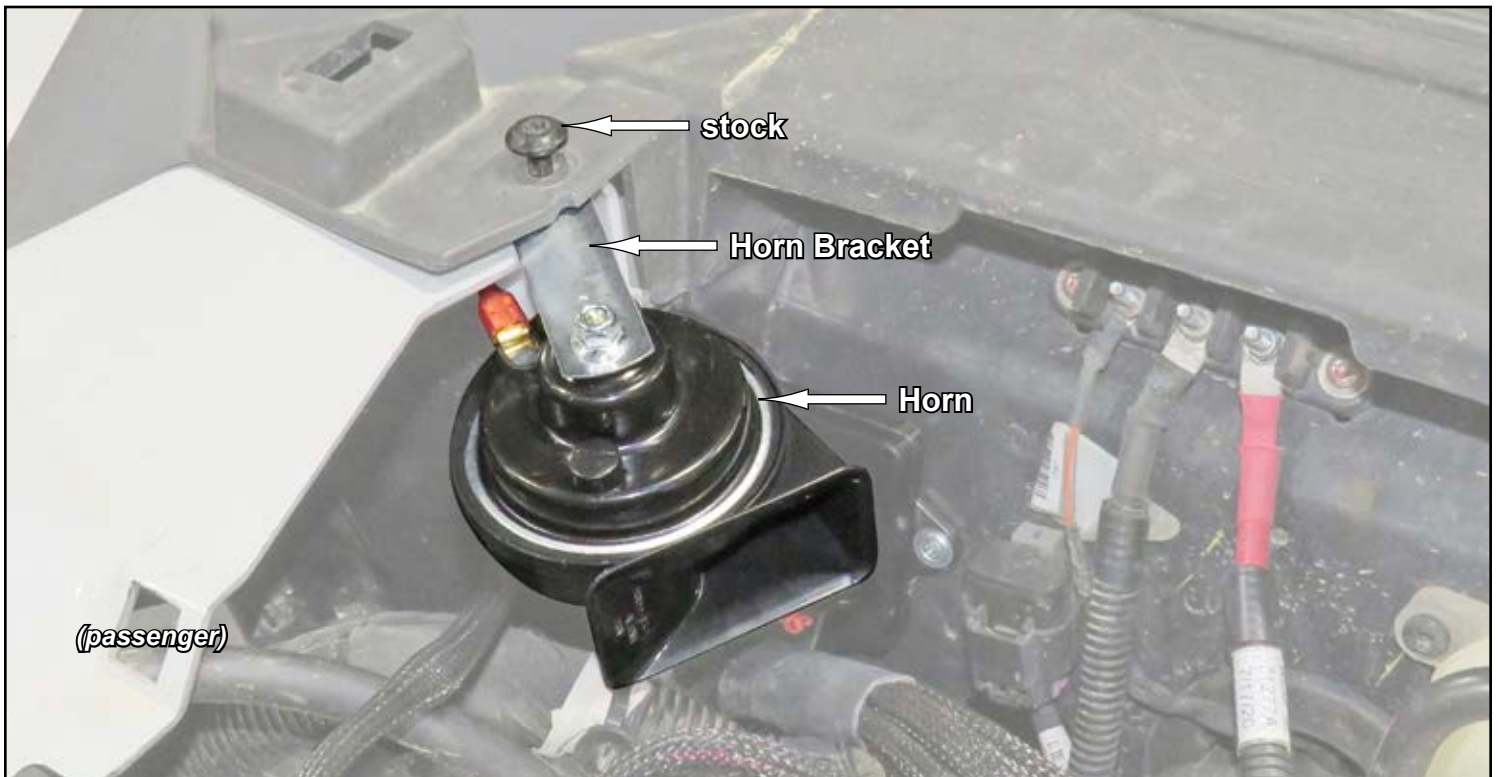

Rear Harness:

- Route Rear Harness to rear of machine as shown.




4 seat models require additional Rear Harness routing; see pages 16 - 17

- Unplug stock harness from location shown.





FUSE MUST BE REMOVED BEFORE CONTINUING

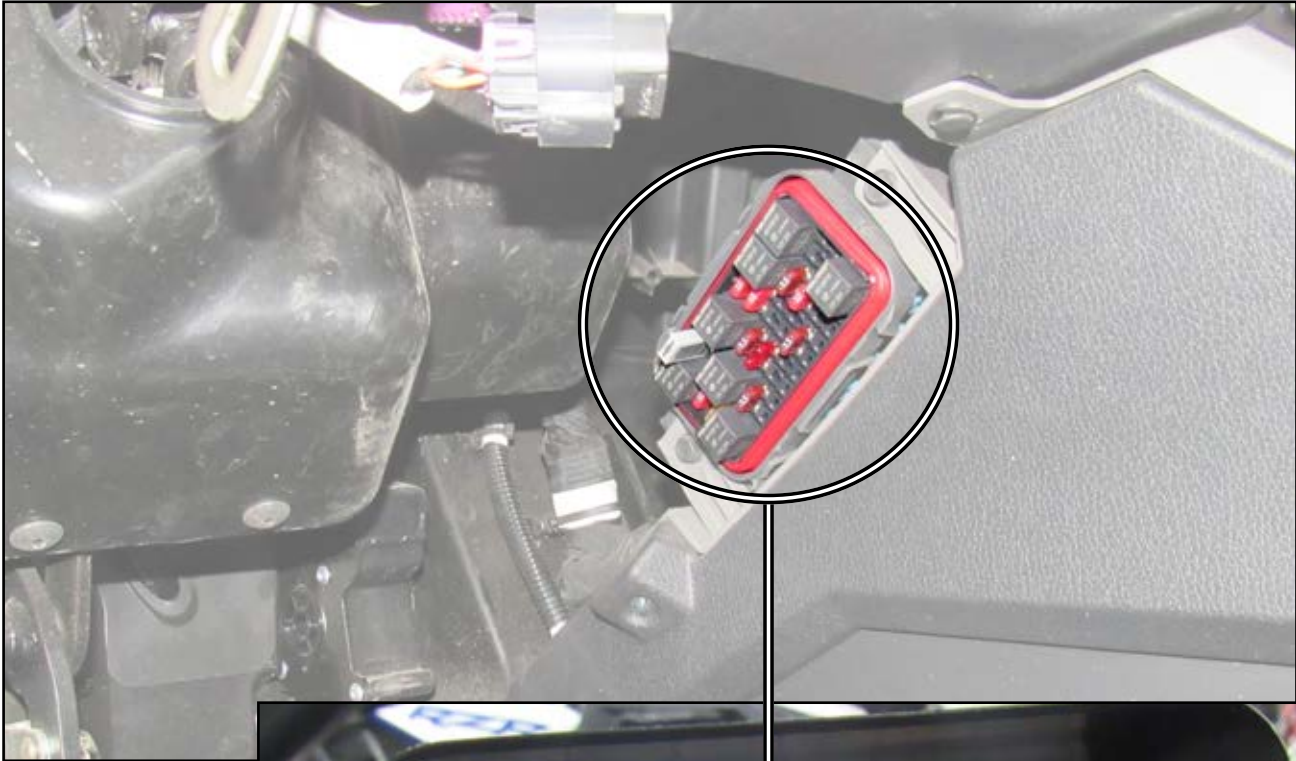

remove "INSTR UNSW 7.5A" Fuse

Indicator Lights:

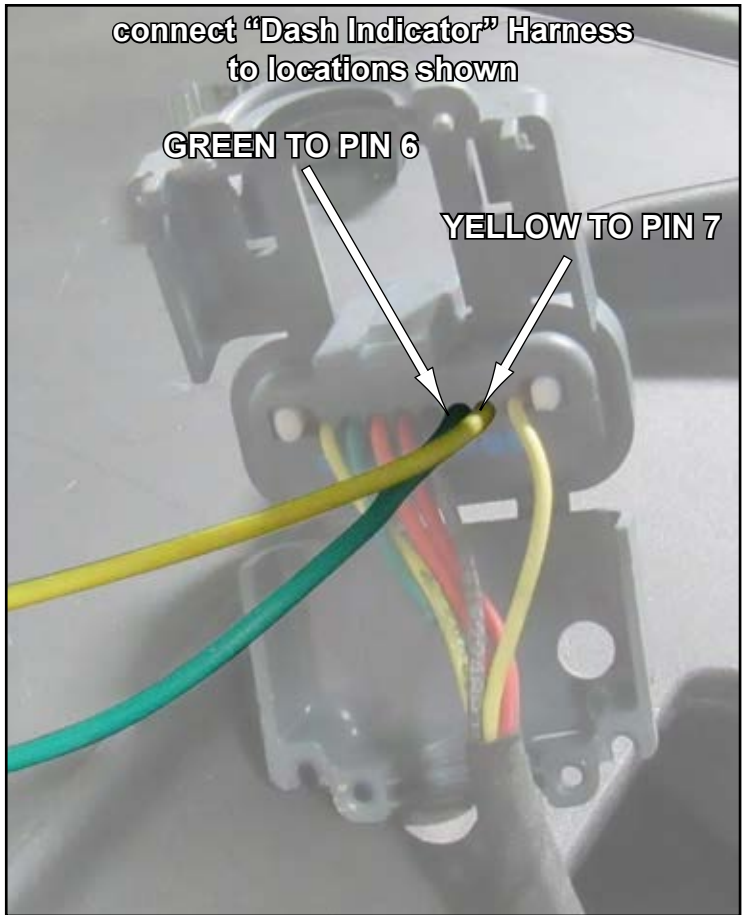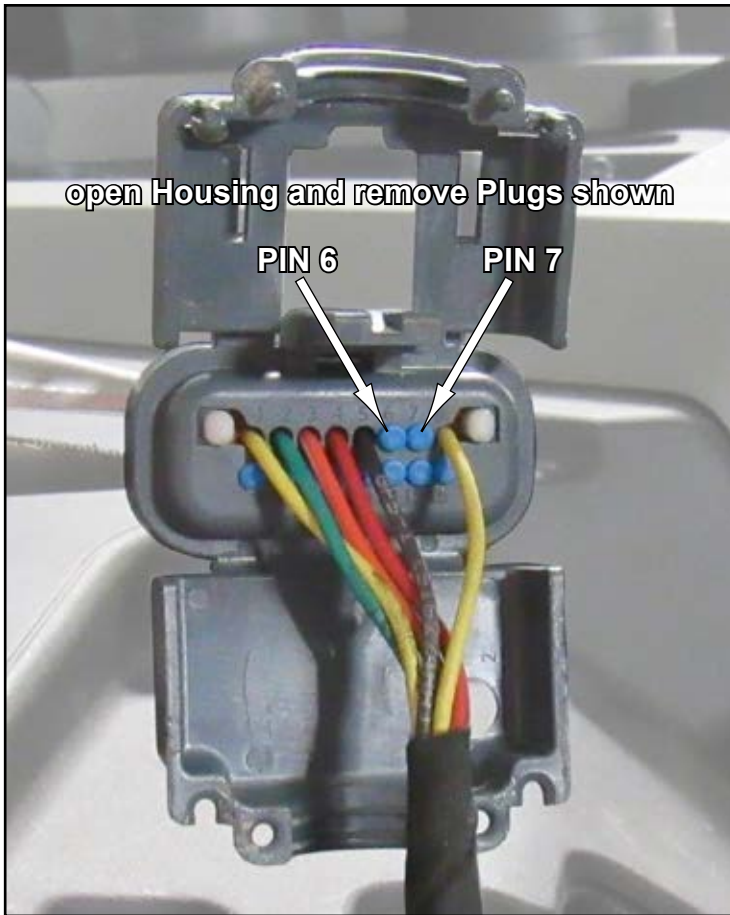

Indicator Lights continued:



REINSTALL PREVIOUSLY REMOVED FUSE

Switch Mounting:

- User may install Switches in locations different than shown.
- Verify that Harness will reach Switches before mounting.

SuperATV recommends testing Switches before permanently mounting.



REINSTALL PREVIOUSLY REMOVED STOCK COMPONENTS

4 seat additional removal steps







(driver)



(driver)


4 seat Rear Harness routing

- Route Rear Harness through Storage Bin opening.




- Route Rear Harness to Closeoffs opening.



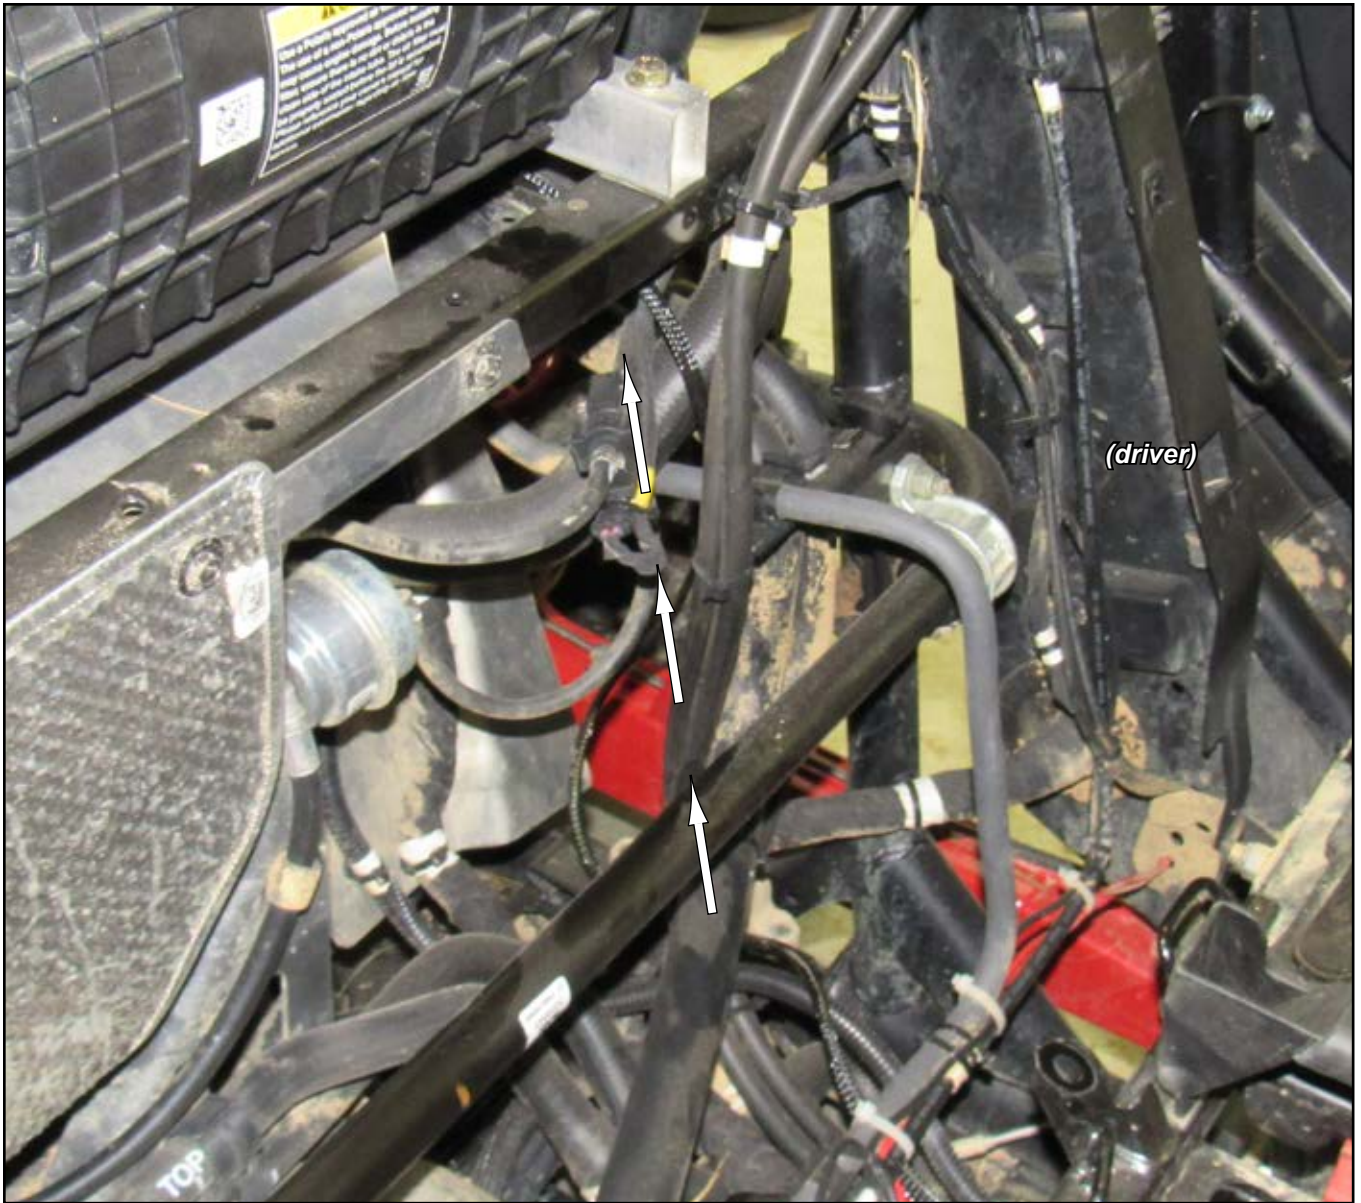

- Route rear section of Harness up and into Clutch Cover area.

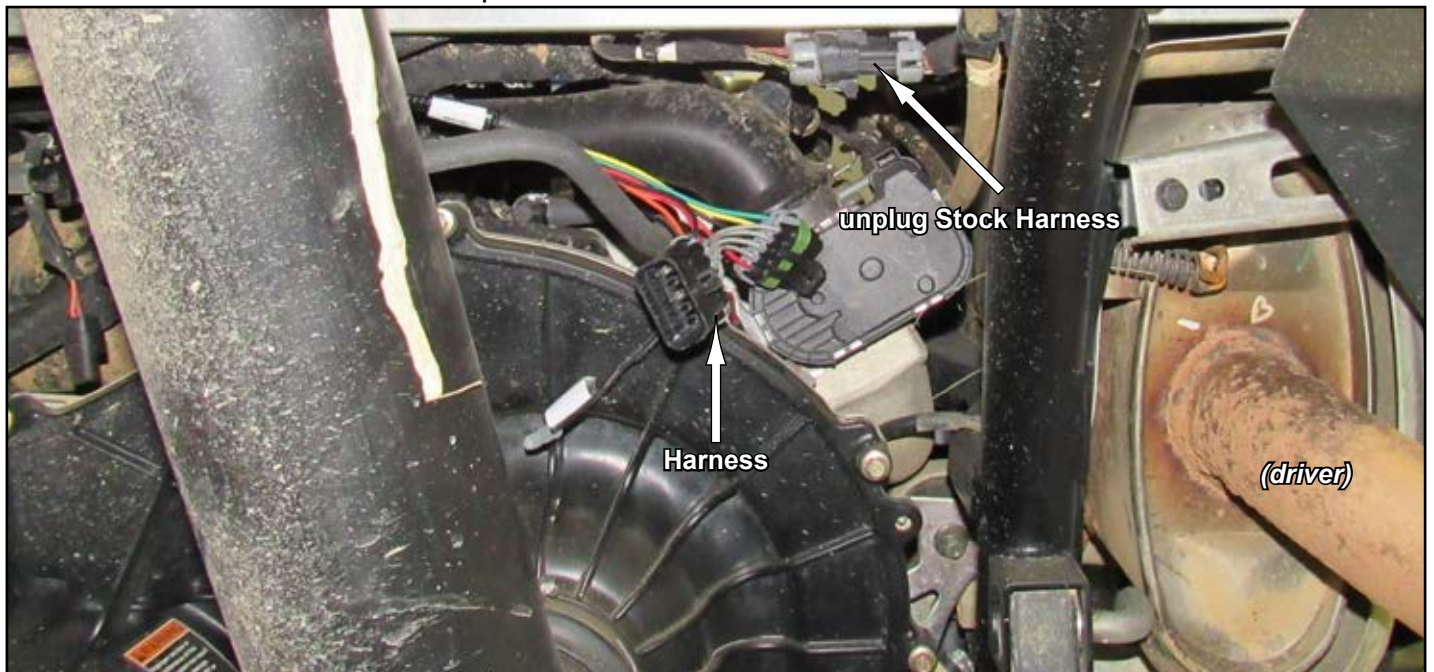


- Return to page 8 and continue installation.

Accessory to Turn Signal Kit Wiring

Left Turn Signal Harness shown in illustrations.



Accessory to Turn Signal Kit Wiring continued

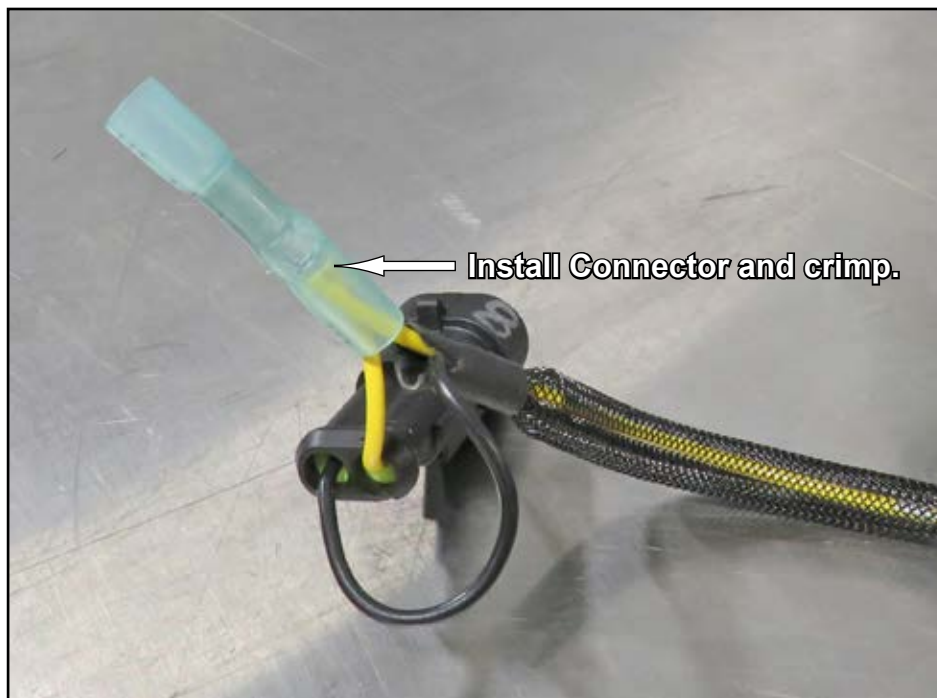

SuperATV recommends using a handheld mini torch, or lighter, to activate heat shrink on Connector.