
2753 Michigan Road • Madison, Indiana 47250 • 855-743-3427

INSTALLATION INSTRUCTIONS

Windshield Wiper Kit: for CFMOTO UFORCE 1000

- Do not discard packaging until product has been successfully installed.
- While routing wires, follow factory wiring when possible and avoid rotating and/or hot components.
- Use provided wire ties and secure wires and Harnesses as needed.
- User may install components in locations different than SuperATV has chosen. Verify that all Tubing and Wiring components will reach.

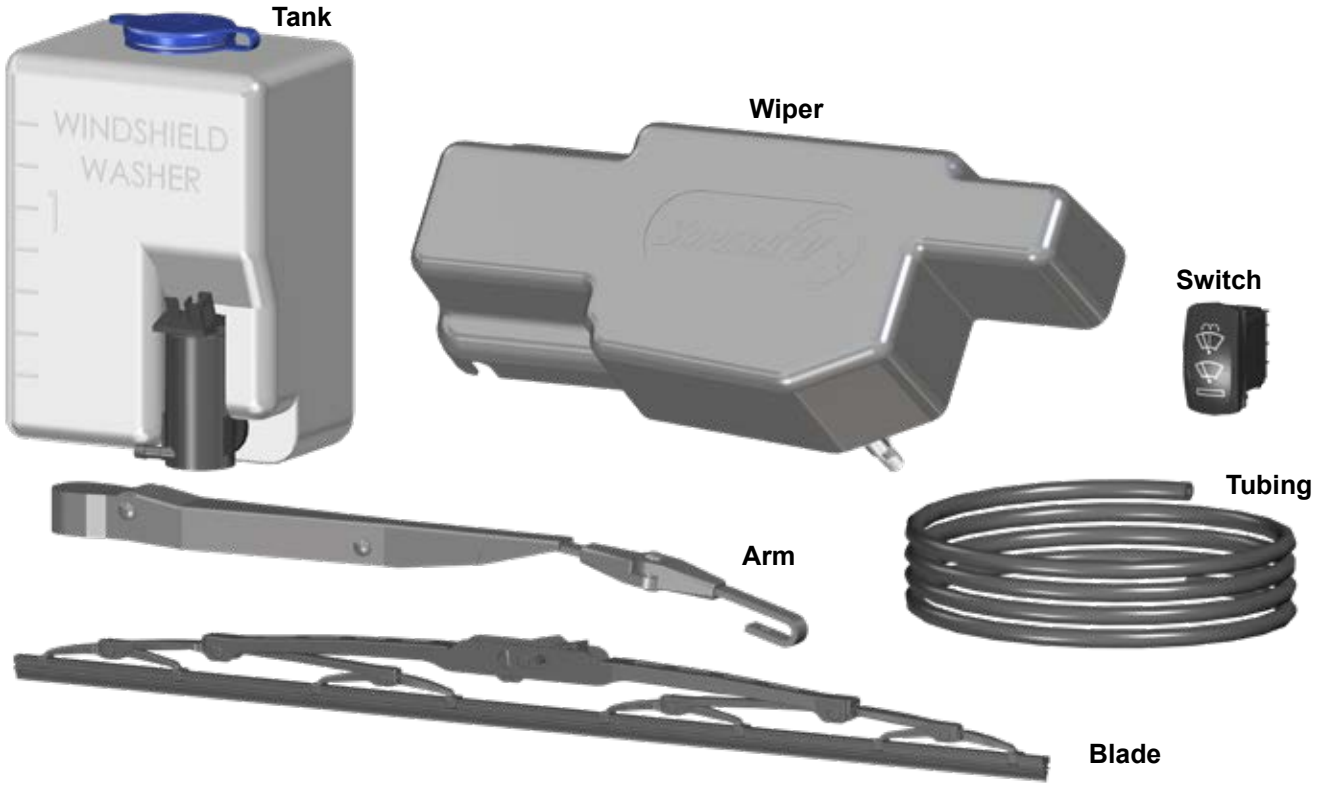

(Kit contents continue on following pages)

Need help with your installation?

sales@superatv.com

www.superatv.com

1-855-743-3427

8:00am - 8:00pm EST M-Th
8:00am - 7:00pm EST Friday
9:00am - 2:00pm EST Saturday


Read instructions and view illustrations before beginning.

Thank You For Choosing

© 2025 SuperATV.com®. All Rights Reserved.


(Kit contents continued)

Switch Harness

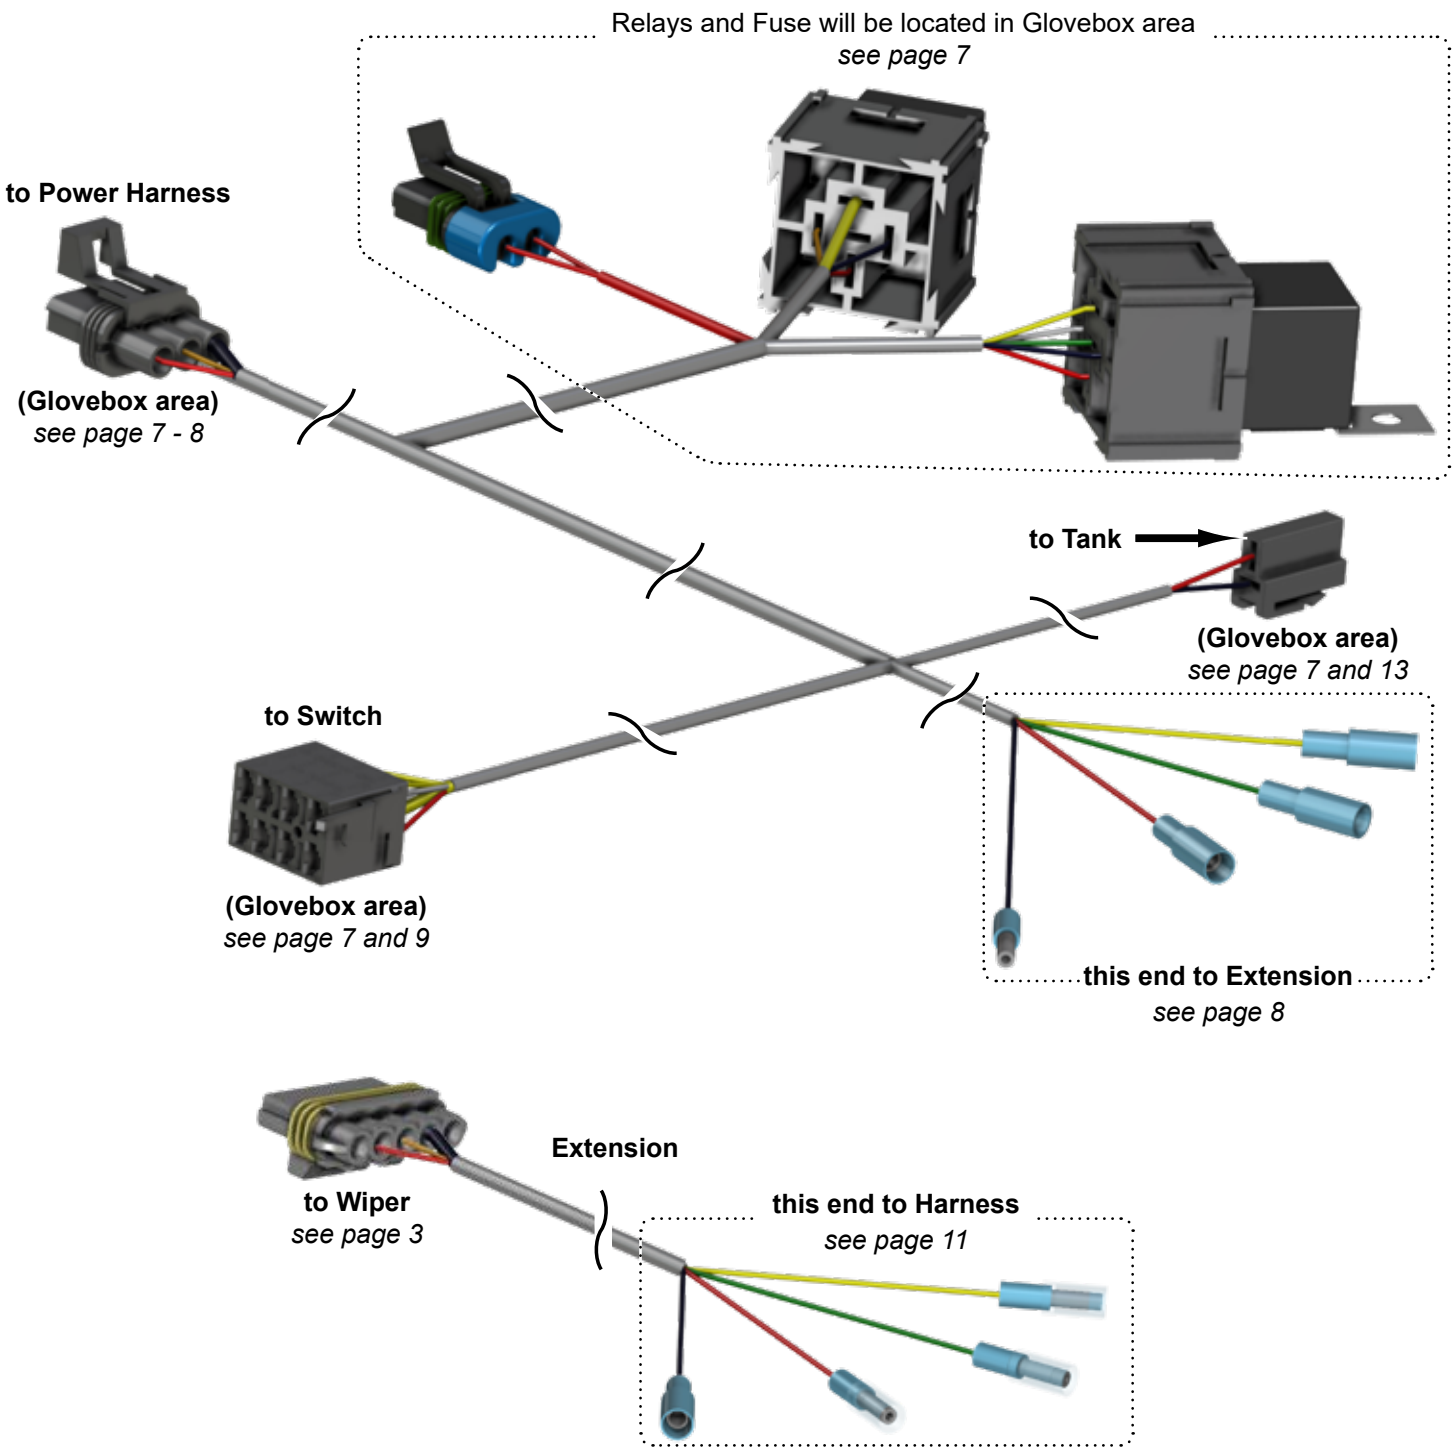


(Kit contents continued)

Power Harness

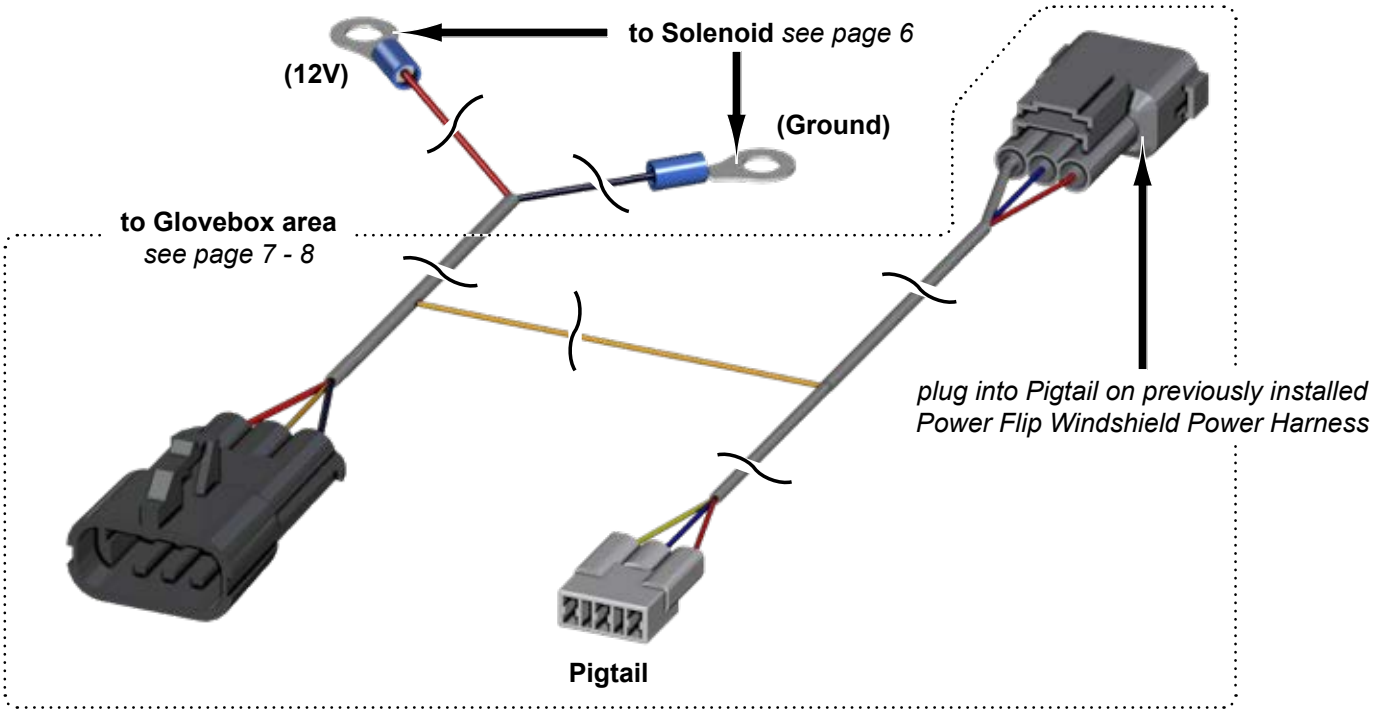

- Prepare Wiper as shown and set aside.

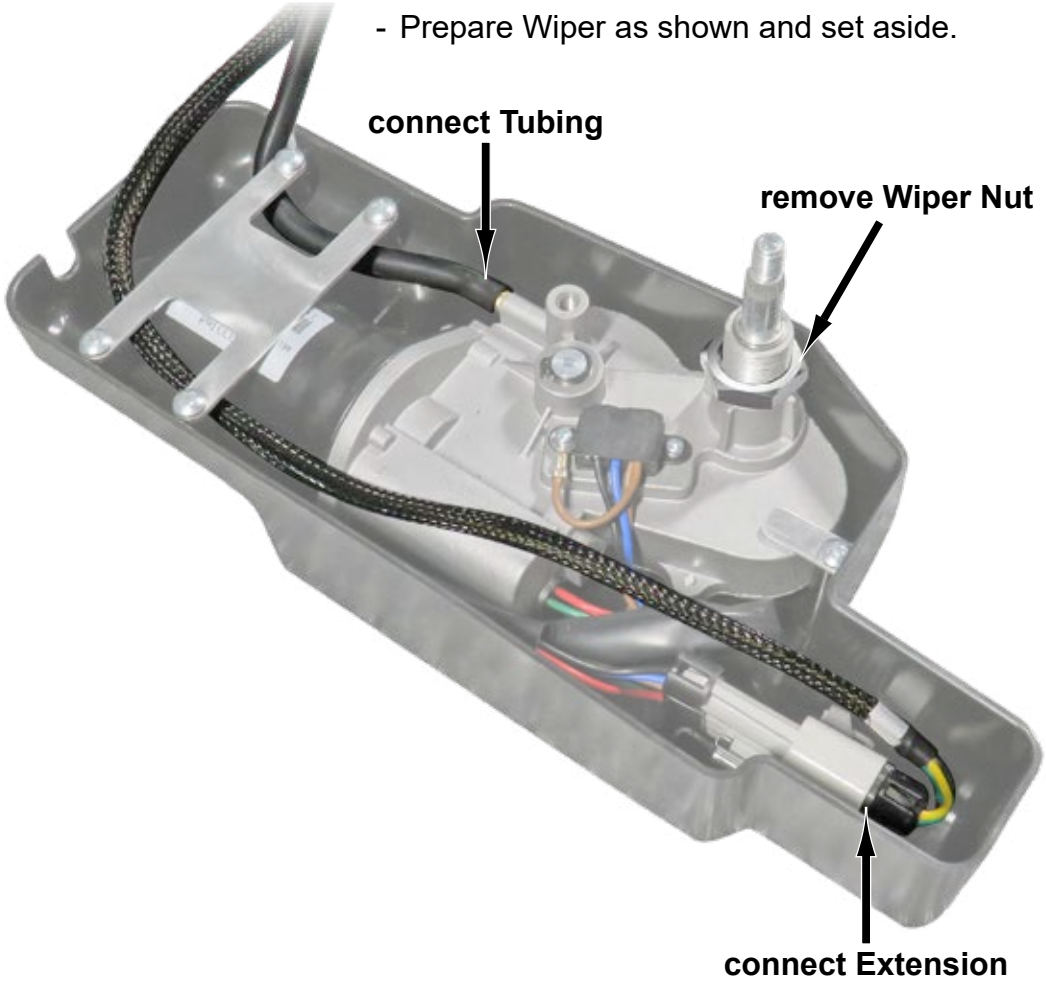

Removal





Reinstall components after Wiper Kit installation has been completed.

Removal continued





Reinstall Gauge Pod and hardware after Wiper Kit installation has been completed.




- Connect Power Harness to stock Solenoid.




- Place Solenoid Boot back into position.


- Route Power Harness shown through Front Inner Lock Plate....

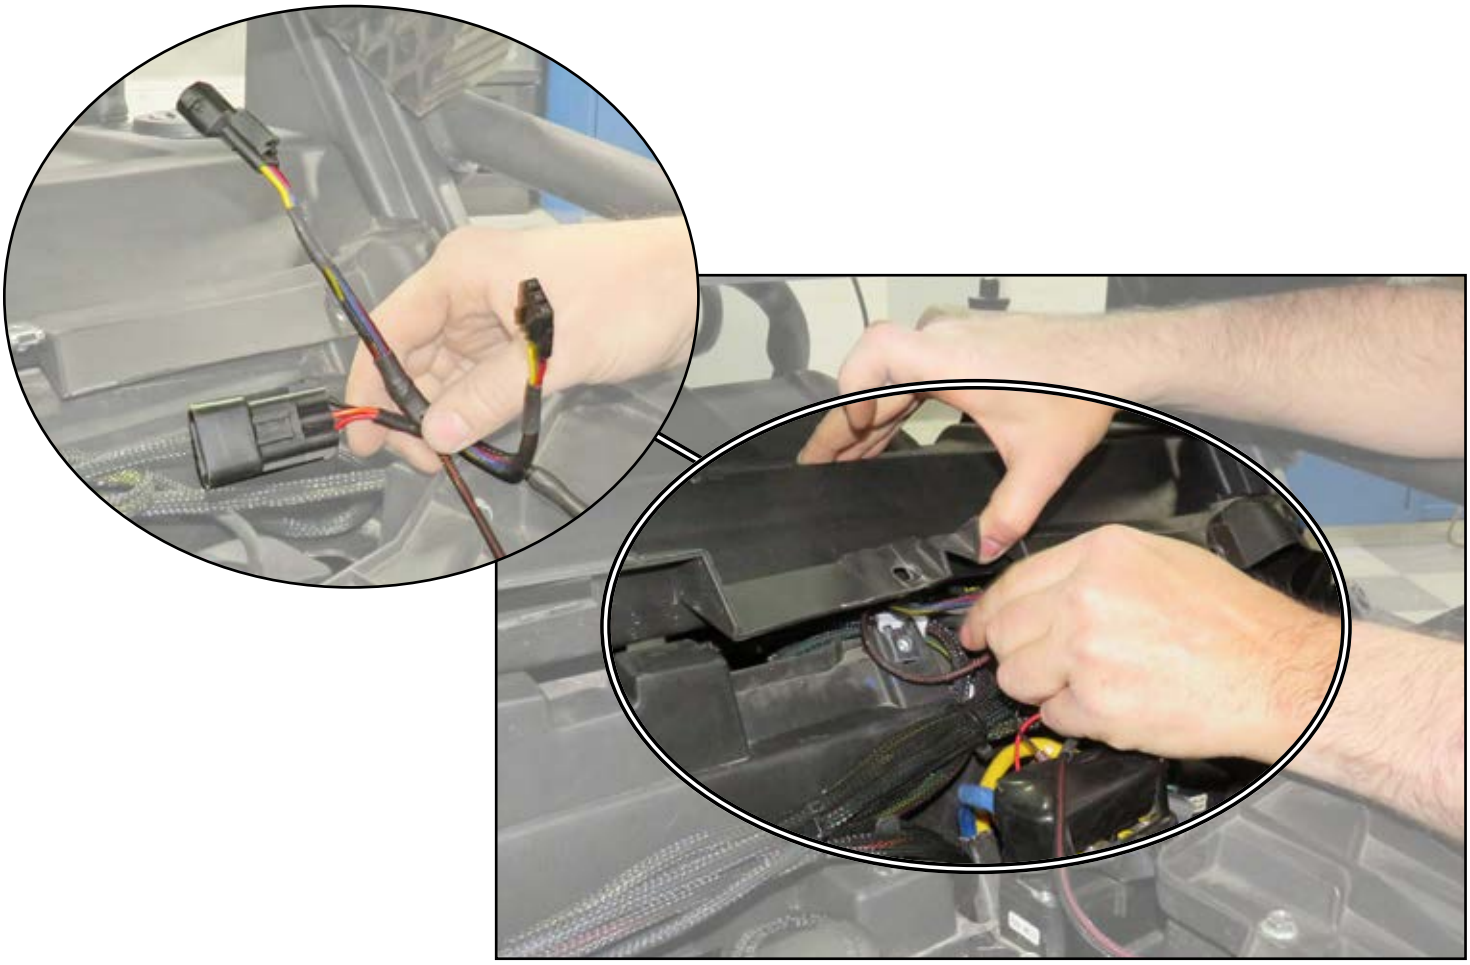

...and to Glovebox area shown.

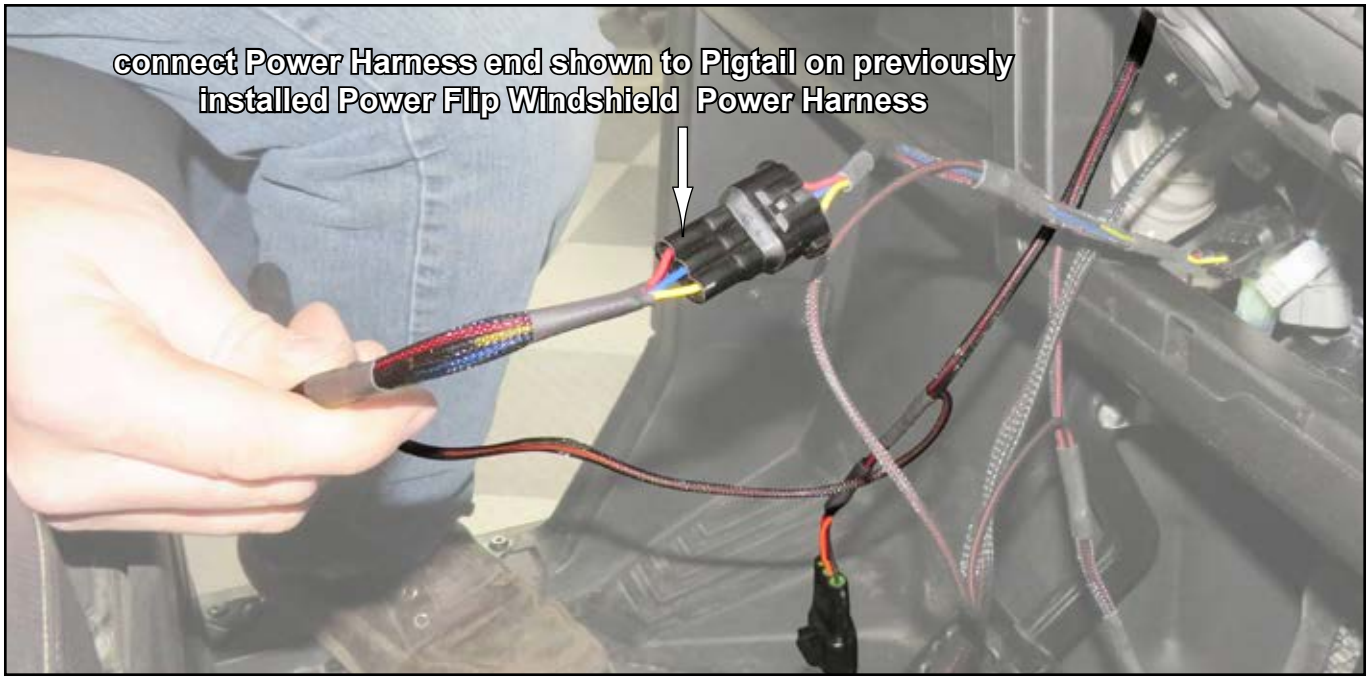



connect Power Harness end shown to Pigtail on previously
installed Power Flip Windshield Power Harness

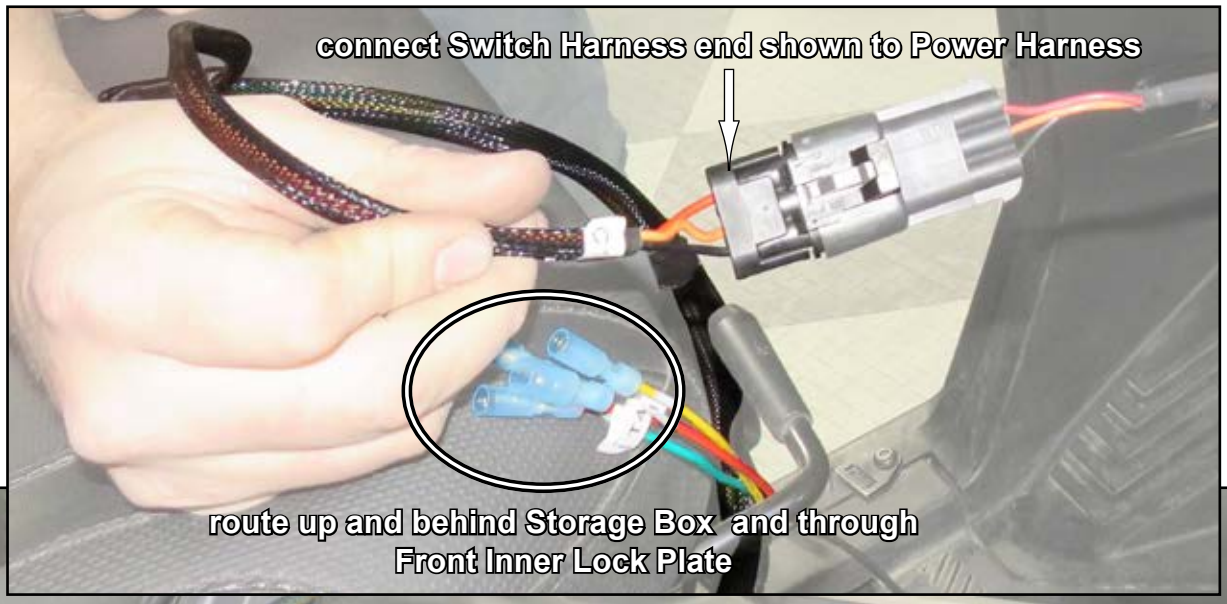

connect Switch Harness end shown to Power Harness
route up and behind Storage Box and through
Front Inner Lock Plate


(passenger)
through Front Inner Lock Plate

- Route connection shown, on Switch Harness, through opening shown.
- User may install Switch in location different than shown.
- Verify that Harnesses will reach Switch before mounting.
- Remove stock Knockout or cut a new location. ***If cutting a new location, check behind area to be cut for any interference.***

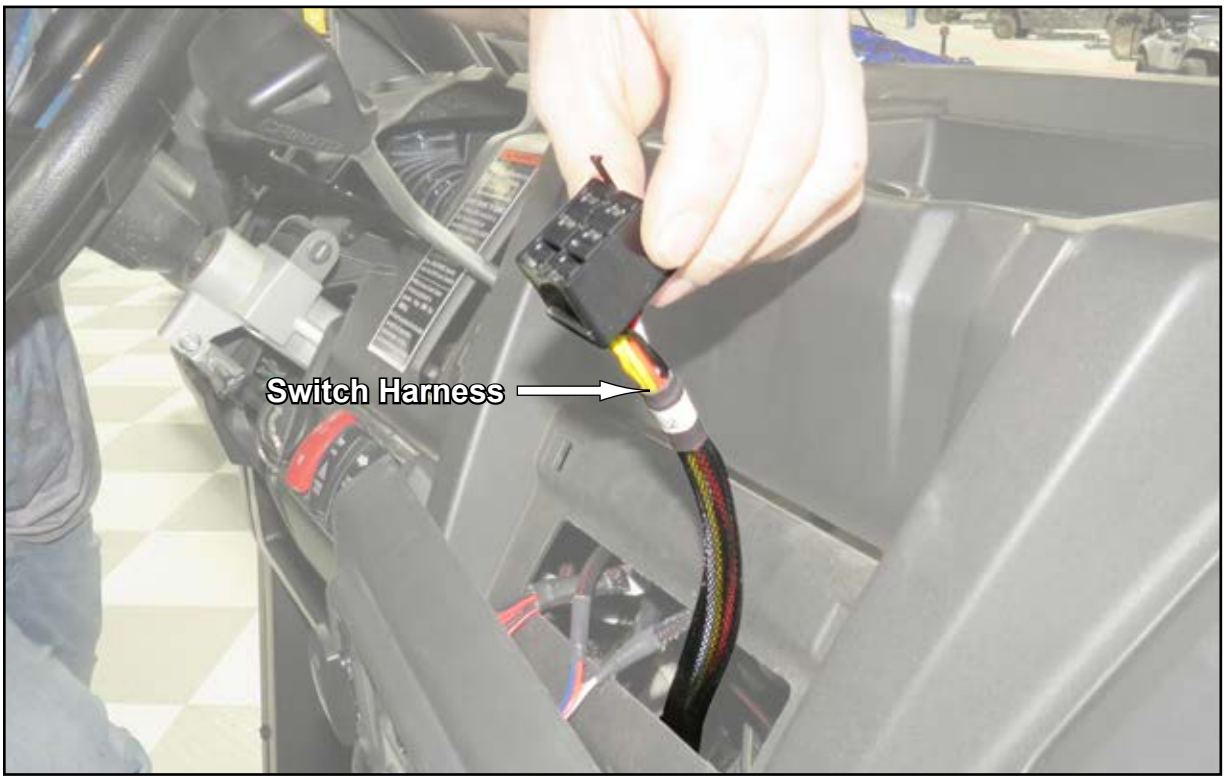



- Connect Switch to Switch Harness.

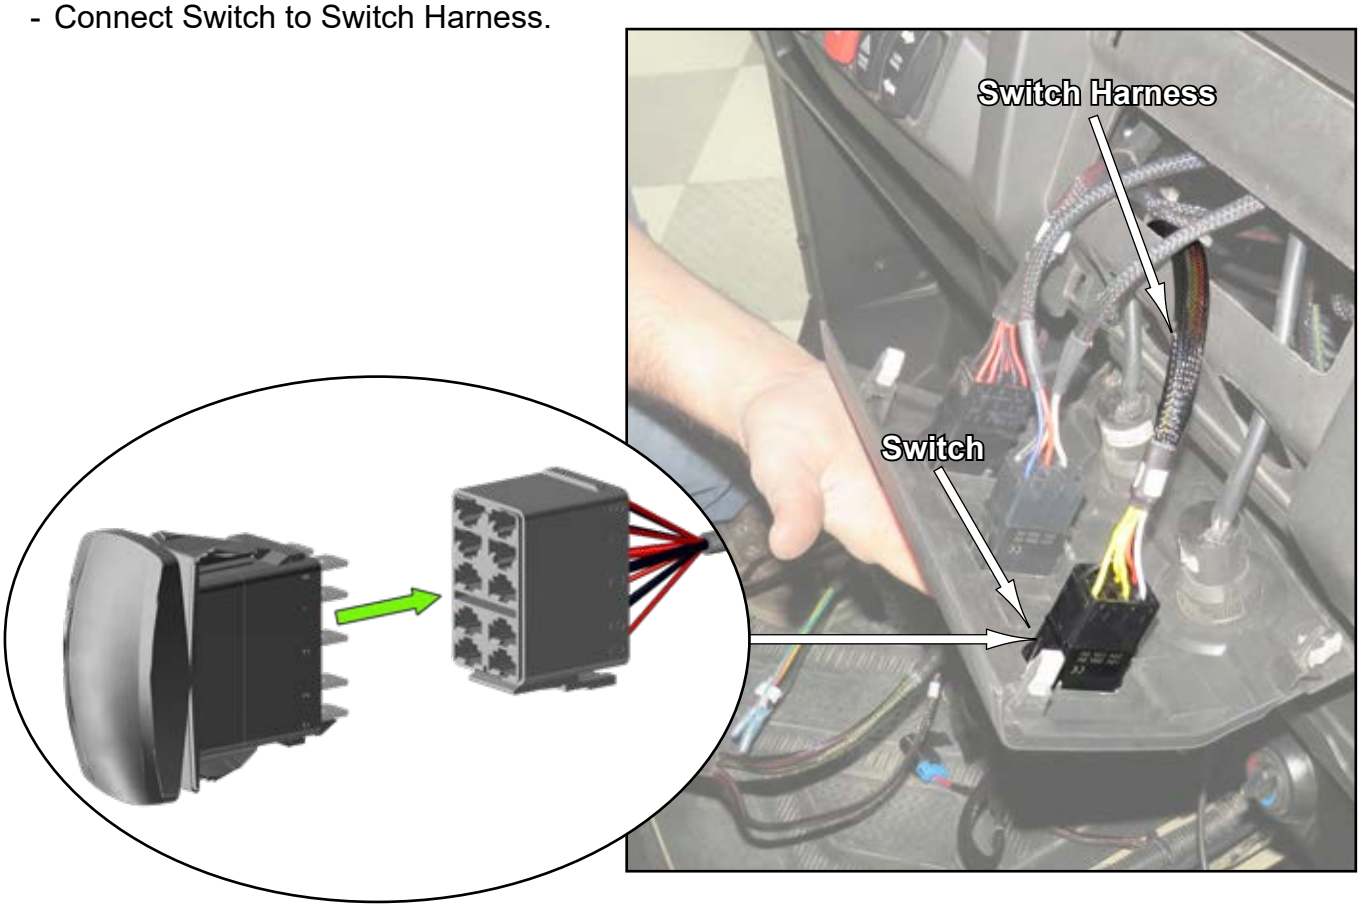

- Install Wiper to Windshield with components shown.
- Tighten hardware.

Nozzle should face bottom of Windshield and stick out approximately 13/16”.

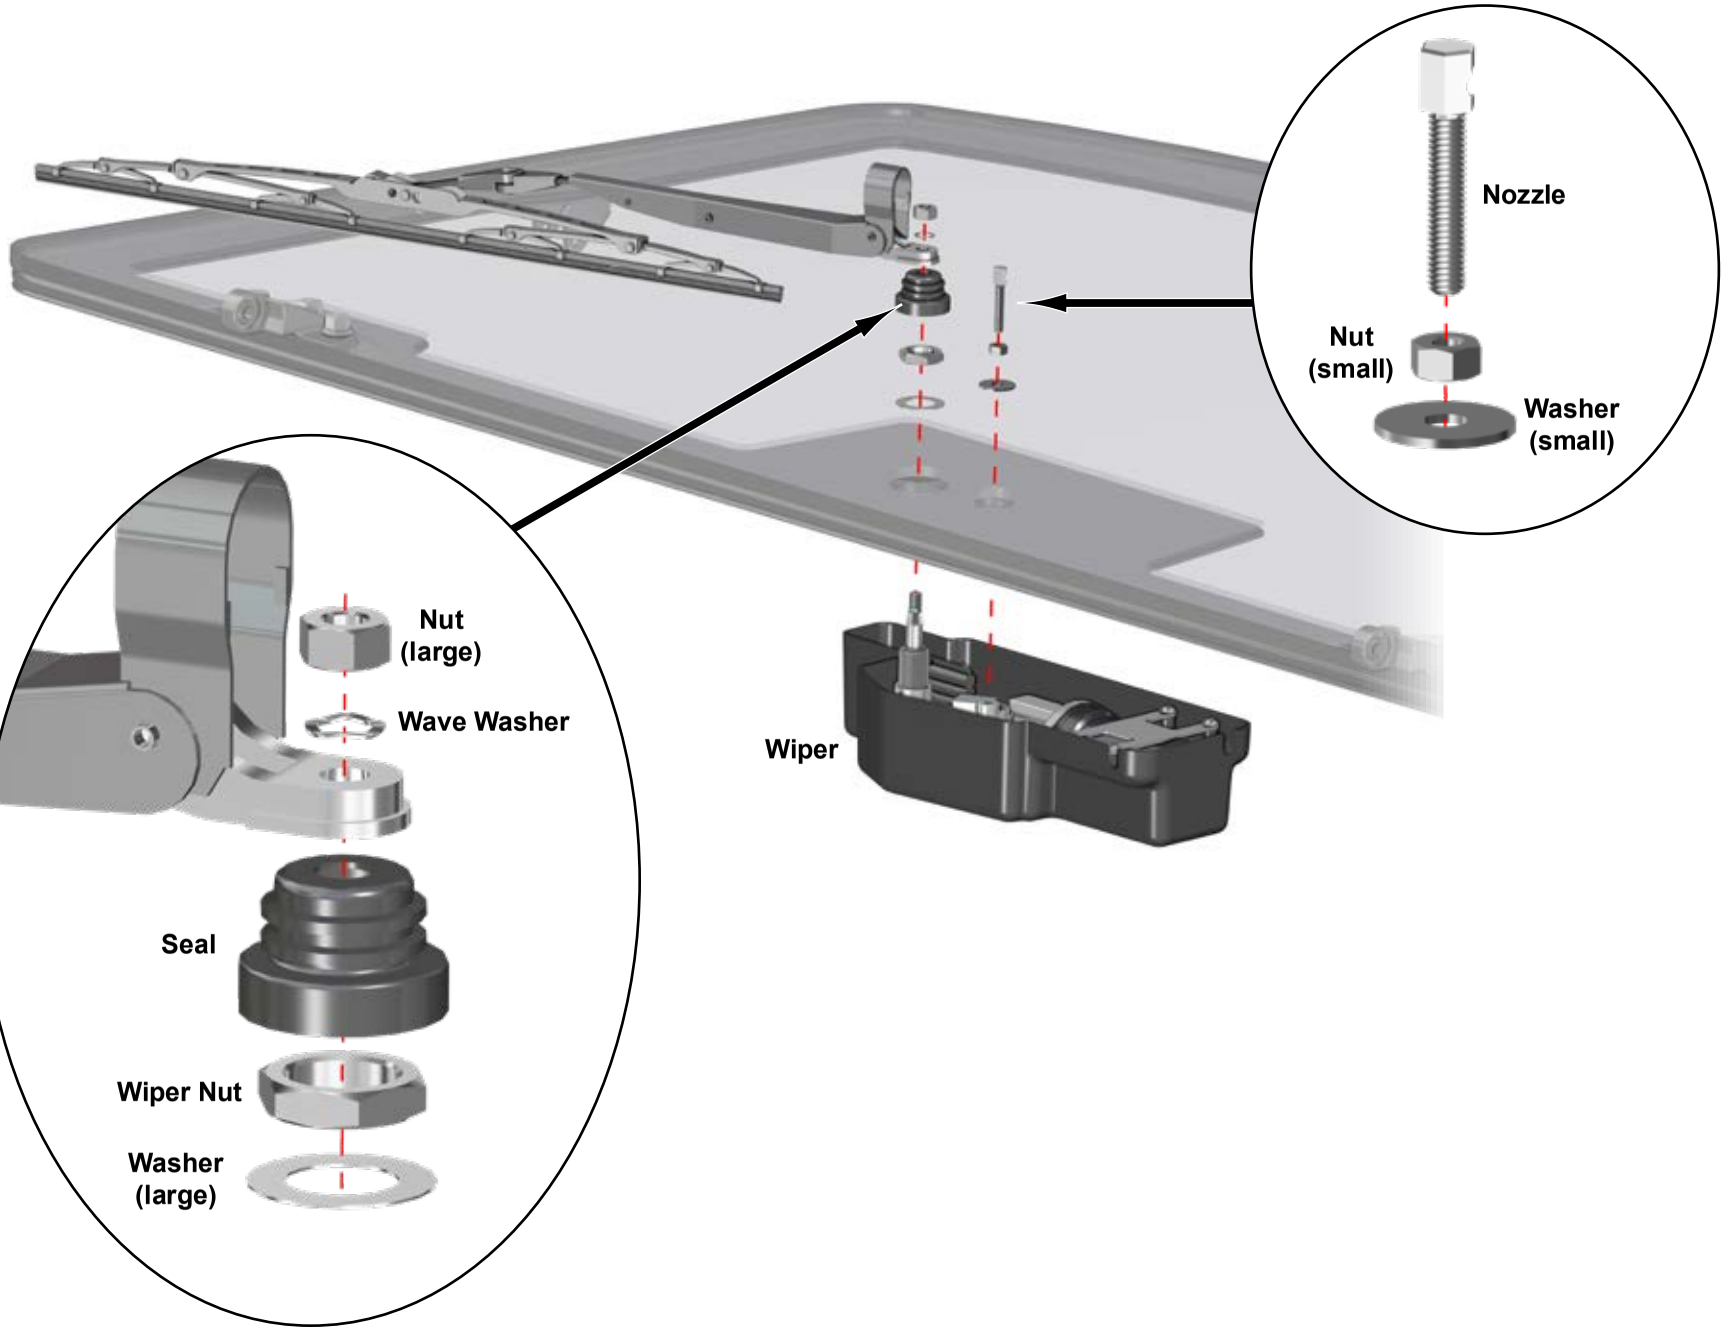


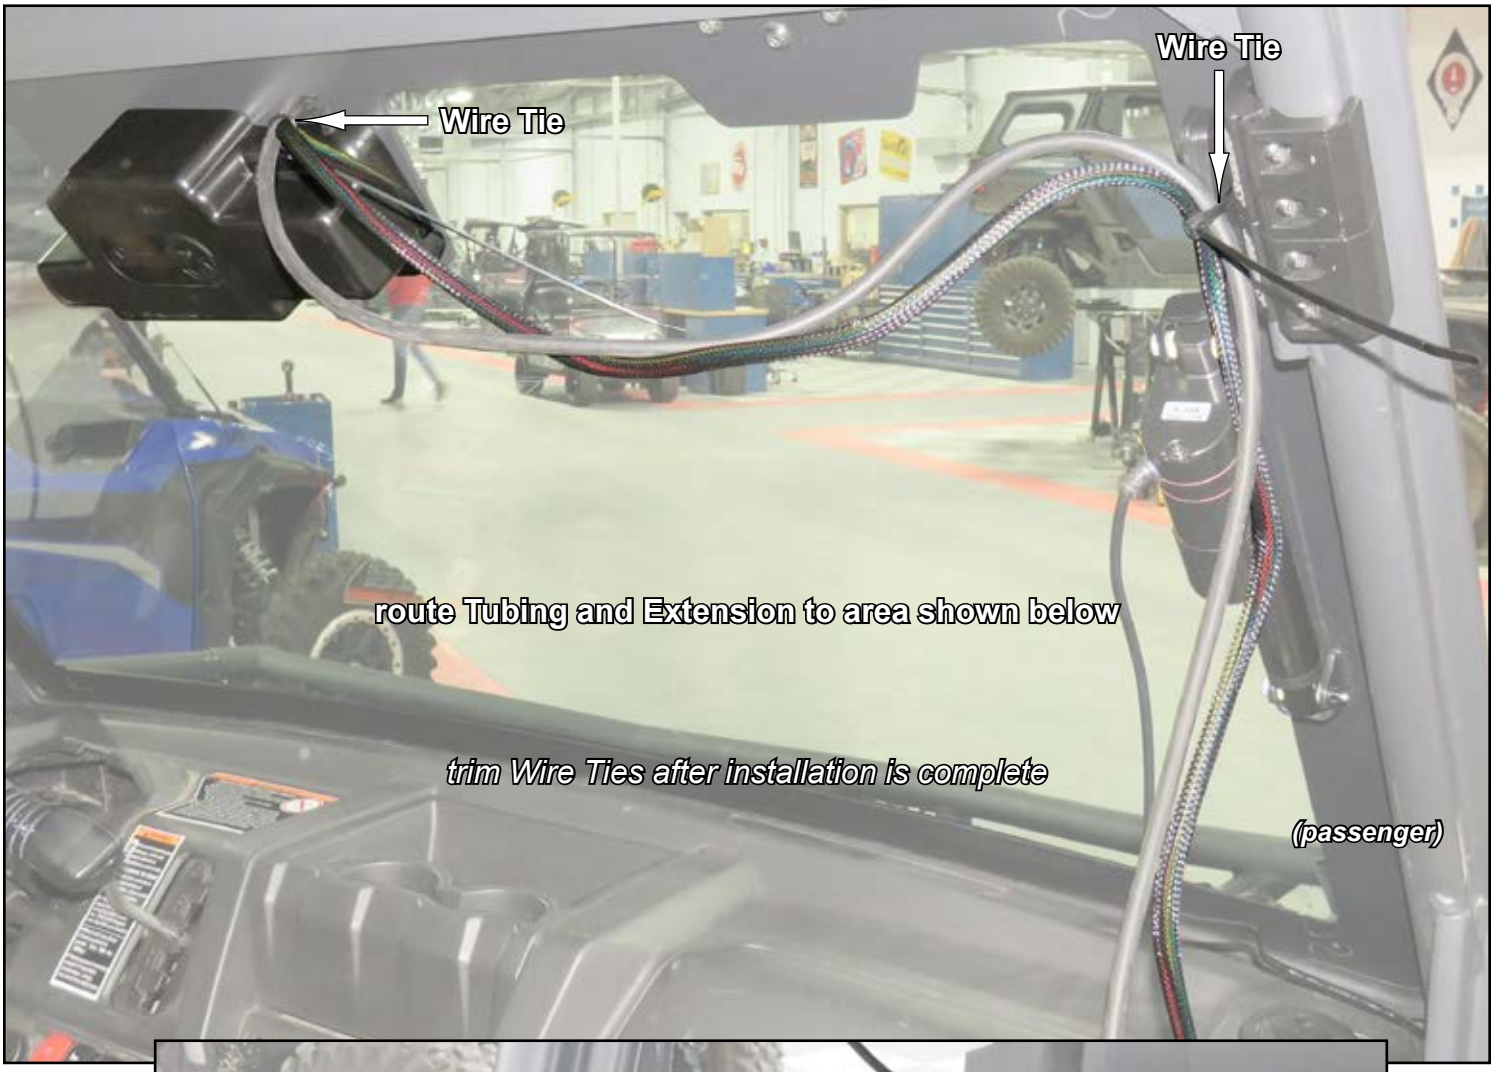

Wire Tie
Wire Tie
route Tubing and Extension to area shown below
trim Wire Ties after installation is complete
(passenger)


connect Extension and Harness



route Tubing towards driver side near Solenoid
Tubing
(passenger)


route Tank connector, on Switch Harness, up and through
Gauge Pod opening and through Front Inner Lock Plate

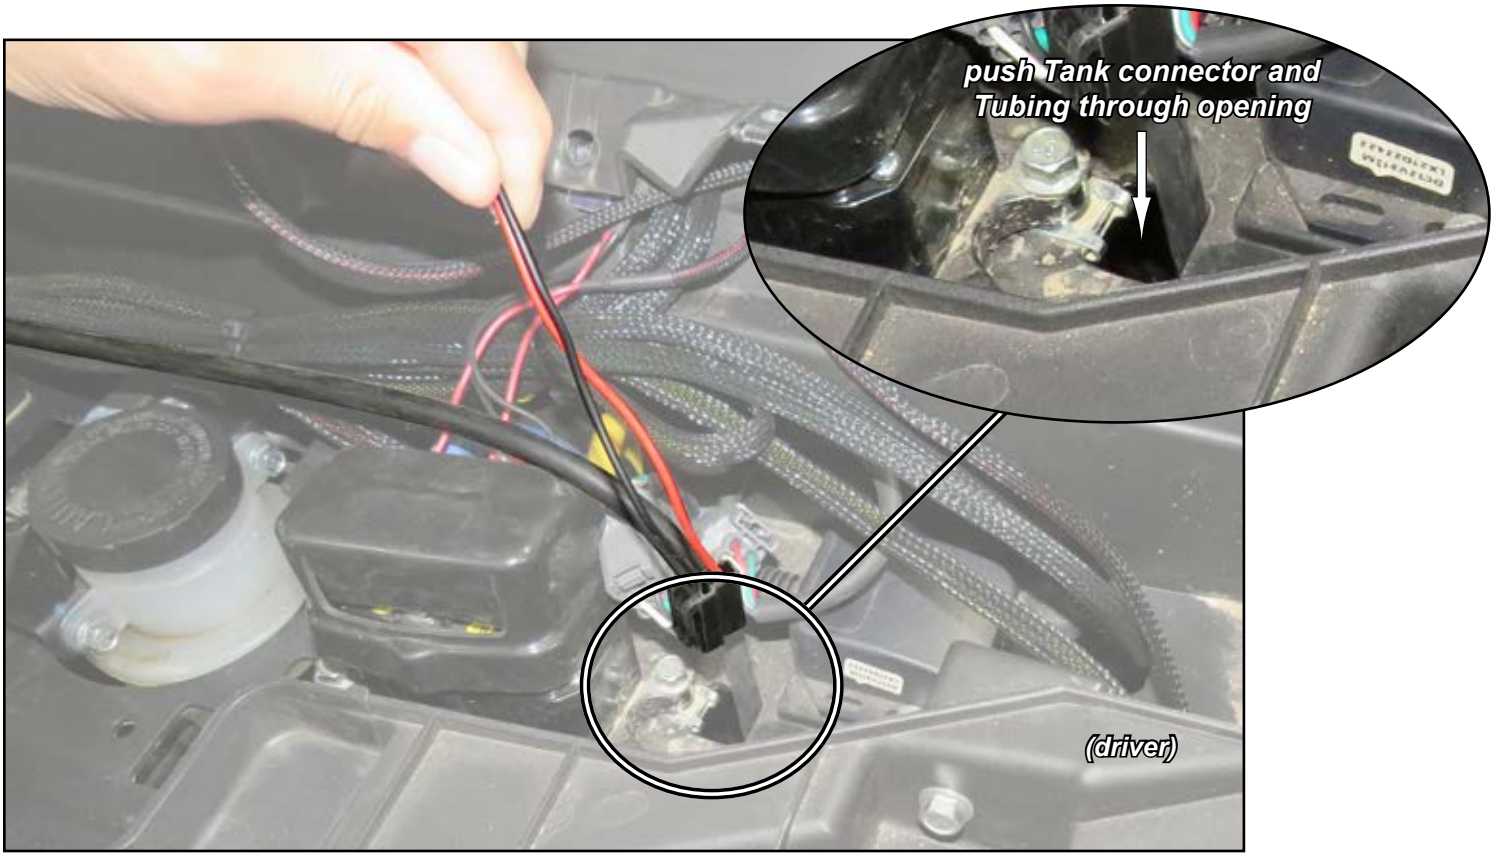
push Tank connector and
Tubing through opening
(driver)

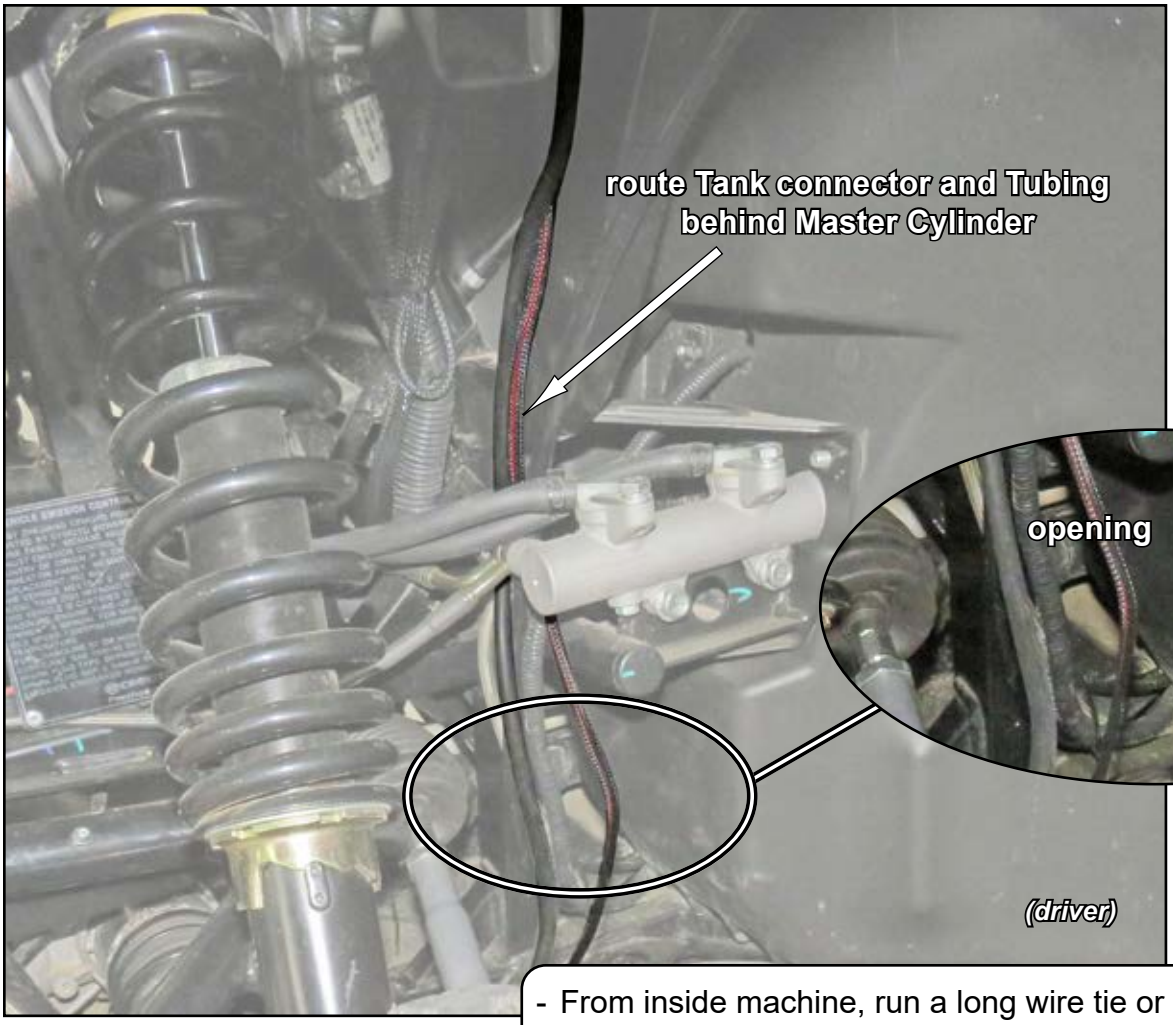

- From inside machine, run a long wire tie or piece of wire through opening and out to where Tank connector and Tubing is.
- Tape components to item and pull Tank connector and Tubing through opening and into machine.
- Remove tape.

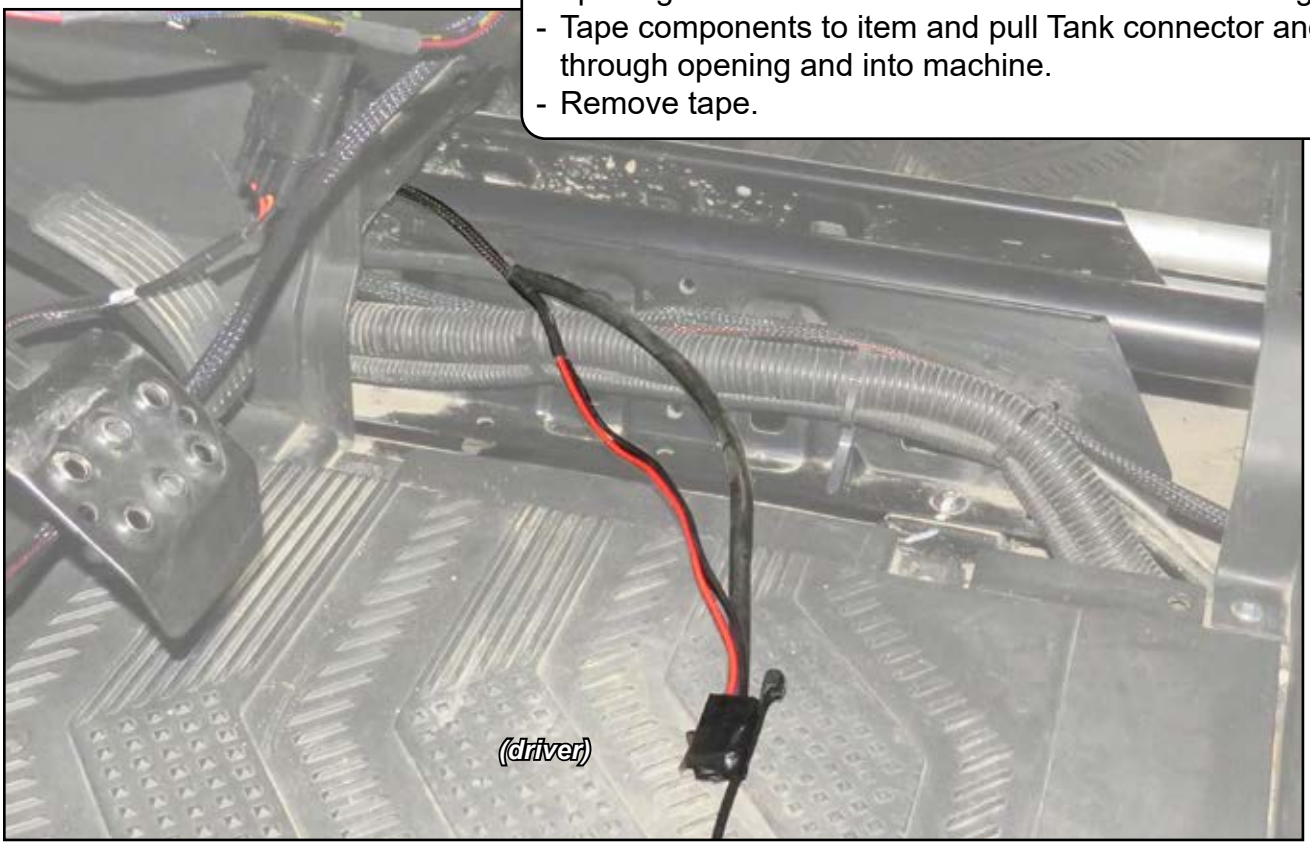





route Tank connector and Tubing up and through Grommet in Middle Lower Guard



- Using dimensions shown, mark hole locations onto Middle Lower Guard.

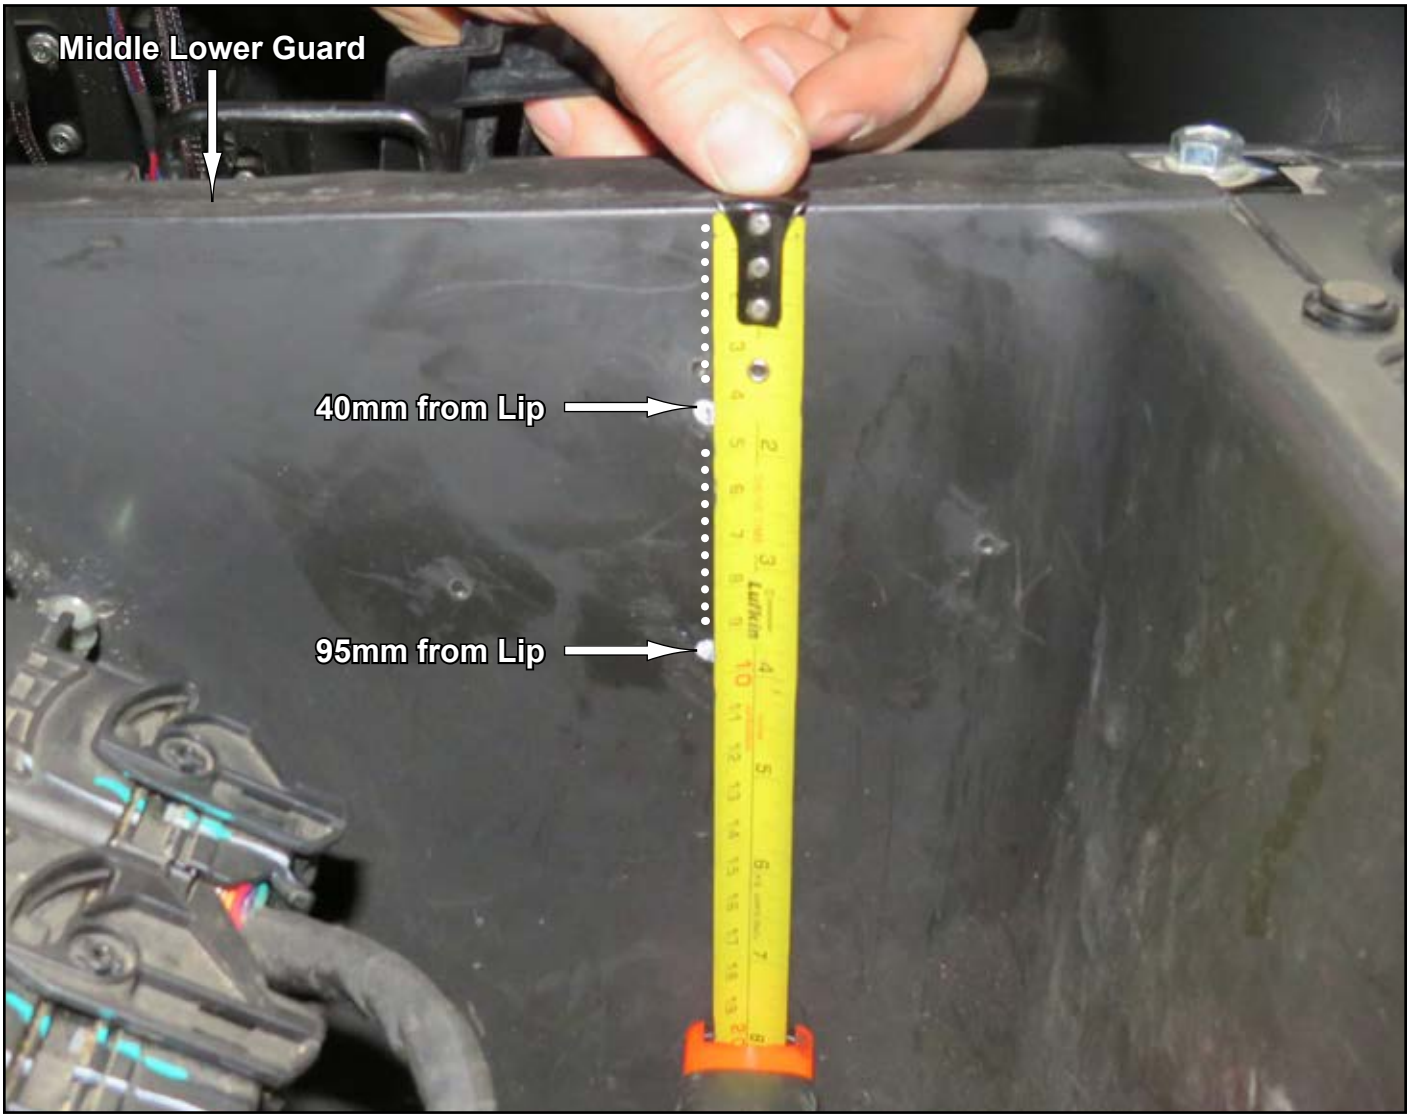


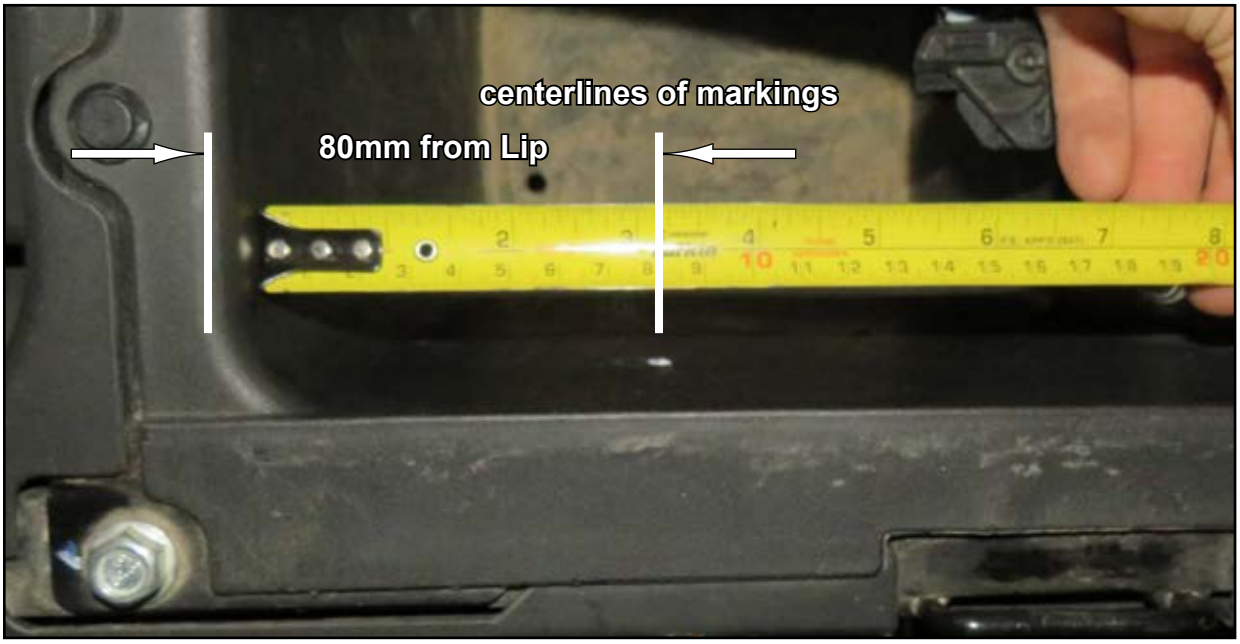


- Drill (2) Ø4mm pilot holes.



- Secure Tank Bracket to Middle Lower Guard with hardware shown; tighten.

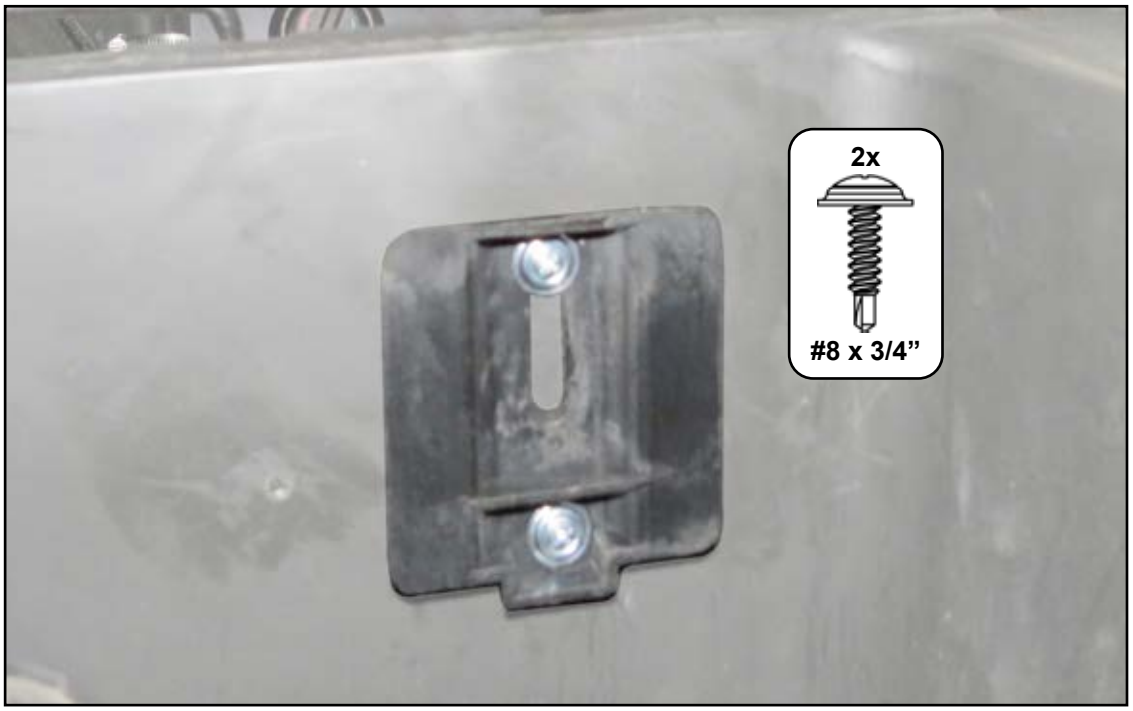

- Connect Tank connector to Tank.
- Trim excess Tubing and connect to Tank.

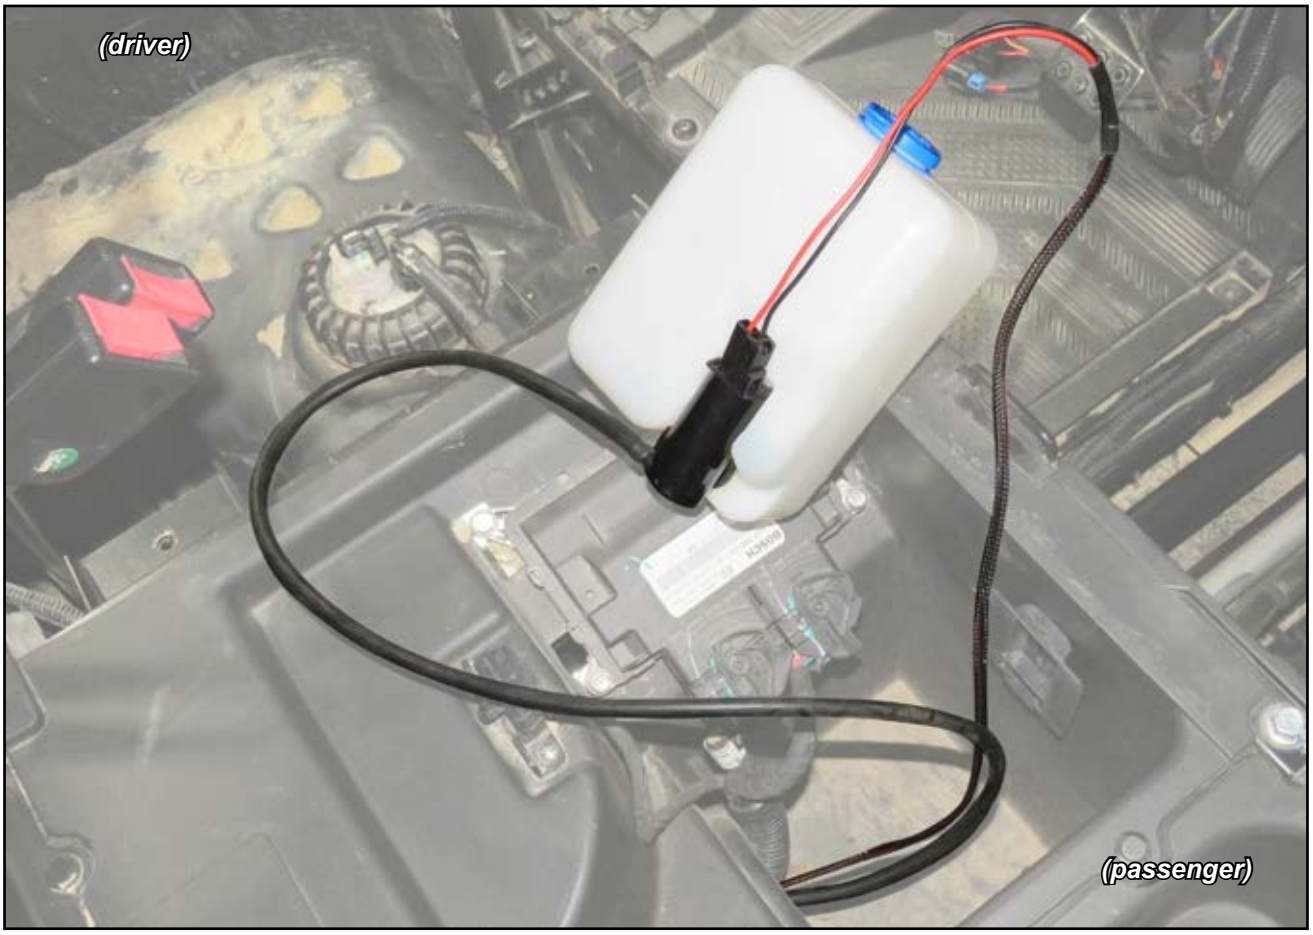

- Slide Tank onto Tank Bracket.





- Cut Wire Guide, from Power Flip Windshield kit, and place Extension and Tubing into Wire Guide.
- Secure to machine in location shown.

Liability Statement

SuperATV's® products are designed to best fit user's ATV/UTV under stock conditions. Adding, modifying, or fabricating any factory or aftermarket parts will void any warranty provided by SuperATV® and is not recommended. SuperATV's® products could interfere with other aftermarket accessories. If user has aftermarket products on machine, contact SuperATV® to verify that they will work together.

Although SuperATV® has thousands of satisfied customers, user should be aware that installing lift kits, long travel, or suspension kits, tires, etc. will change the ride of machine and may increase maintenance and part wear. Operating any off-road machine while, or after, consuming alcohol and/or drugs increases risk of bodily harm or death. No warranty or representation is made as to this product's ability to protect user from severe injury or death. SuperATV® urges operators and occupants to wear a helmet and appropriate riding gear at all times.

By purchasing and installing SuperATV® products, user agrees that should damages occur, SuperATV® will not be held responsible for loss of time, use, labor fees, replacement parts, or freight charges. SuperATV®, nor any 3rd party, will not be held responsible for any direct, indirect, incidental, special, or consequential damages that result from any product purchased from SuperATV®. The total liability of seller to user for all damages, losses, and causes of action, if any, shall not exceed the total purchase price paid for the product that gave rise to the claim.

SuperATV® will warranty only parts provided by SuperATV®. Any damage or problems with OEM housings, bearings, seals, or other manufacturers' products will not be covered by SuperATV®. SuperATV® parts and products are not warrantied if item was not installed properly, misused, or modified.

Installing, adding, modifying, or fabricating any factory or aftermarket product to your ATV/UTV may violate certain local, state, and federal laws. Be advised that laws vary depending on town, city, county, state, etc. Use of certain products on public streets, roads, or highways may be in violation law. The Buyer is solely and exclusively legally and personally responsible for any violation of the law by the installation or use of the product. You must abide by all local, state, and federal laws, including but not limited to vehicle safety, traffic laws, and ordinances. It is your responsibility to know the laws and how they apply to you.

The Buyer is responsible to fully understand the capability and limitations of his/her vehicle according to manufacturer specifications, warnings and instructions and agrees to hold SuperATV® harmless from any damage resulting from failure to adhere to such specifications, warnings and/ or instructions. The Buyer is also responsible to obey all applicable federal, state, and local laws and ordinances when operating his/her vehicle while using this product, and the Buyer agrees to hold SuperATV® harmless from any violation thereof.