




JEEP WRANGLER JK 2007-2017

SCAN OR CLICK TO
WATCH INSTALL VIDEO

YouTube

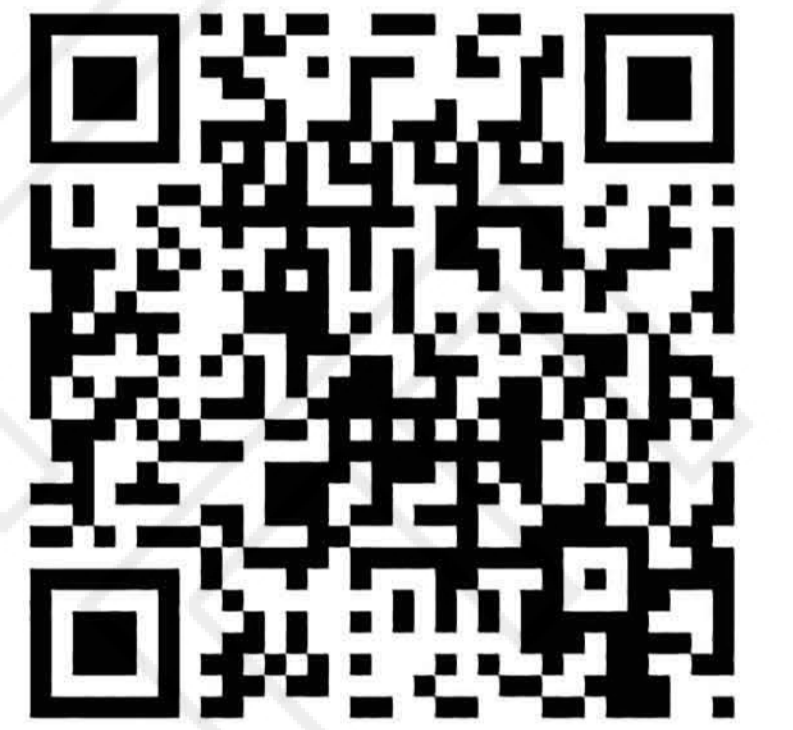

STEP 1: Open the hood and remove the (6) plastic rivets in the upper grill using a flathead screwdriver.



STEP 2: Disconnect the turn signal wires so that the grill can be removed and set to the side.



STEP 3: Remove the (4) T15 Torx Screws that hold the headlight trim ring bezel and lamp housing in place.



STEP 4: Connect the new LED Headlight to the factory plug. On Jeep JK use the included headlight flicker free module.



*Needed for
JK Model Only.

STEP 5: Slide Red Clip to Lock. If you can not squeeze together use a needle nose pliers to slide the clip. Now Reverse Steps 1-3.

