2753 Michigan Road • Madison, Indiana 47250 • 855-743-3427

INSTALLATION INSTRUCTIONS

Plug and Play Turn Signal Kit:

for CFMOTO UFOCE 1000

- Do not discard packaging until product has been successfully installed.
- Components may be installed in locations other than where shown. Alway verify wire harness length.
- While routing, follow factory wiring when possible.
- Use provided dielctric grease on all connections.
- Always consult labels on Harnesses when making connections.
- Avoid rotating or hot components when securing.
- Before drilling any holes, check behind area to be drilled for any interference.



Horn Kit

(Bracket not used)

ECU

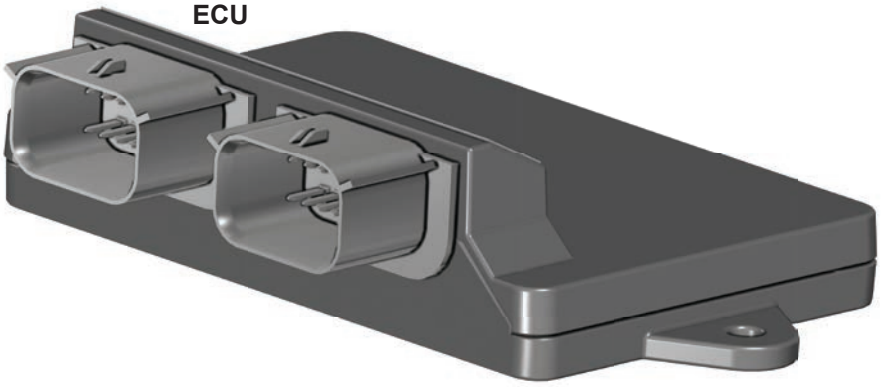



Turn Signal Switch



Hazard and Horn Switch

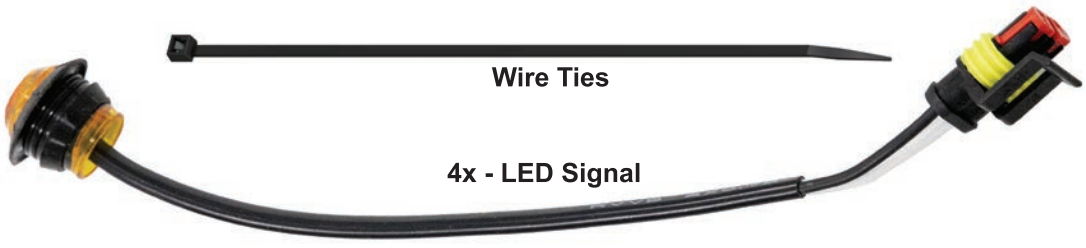

Wire Ties

4x - LED Signal

Need help with your installation?

sales@superatv.com

www.superatv.com

1-855-743-3427

8:00am - 8:00pm EST M-Th
8:00am - 7:00pm EST Friday
9:00am - 2:00pm EST Saturday

Read instructions and view illustrations before beginning.

Thank You For Choosing

© 2023 SuperATV.com®. All Rights Reserved.

Rev IN-TSK-CF-UF1K-007 7/2/2025



to Horn

(see pages 3 and 17)

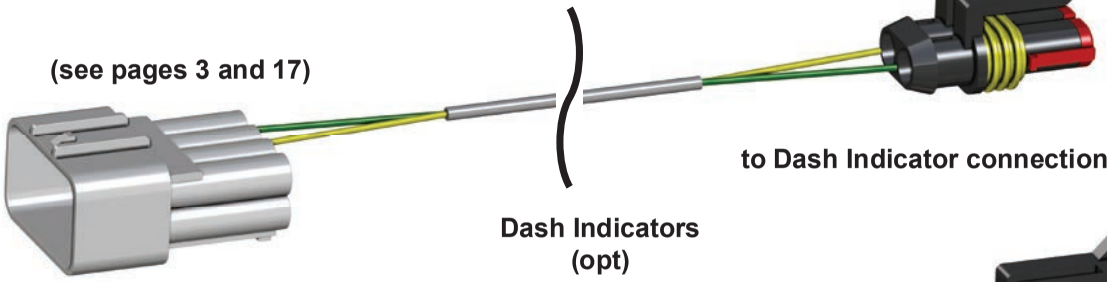

to Dash Indicator connection on Harness

Dash Indicators
(opt)

(see pages 3 and 18)

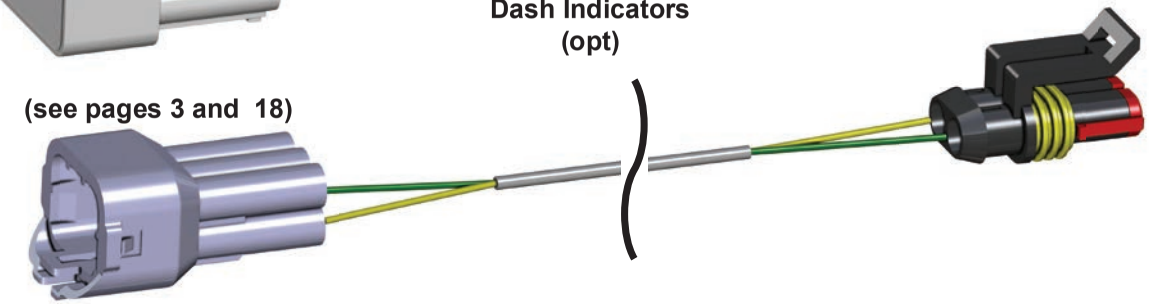

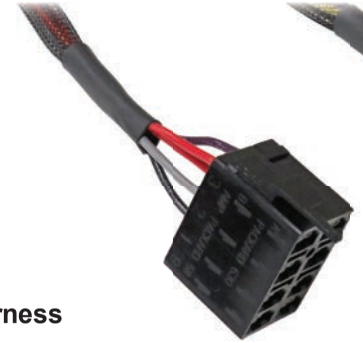

to Turn Signal Switch



to Horn / Hazard Switch



to ECU

to rear of machine

to License Plate Light
(opt)

to Right Rear Tail Light

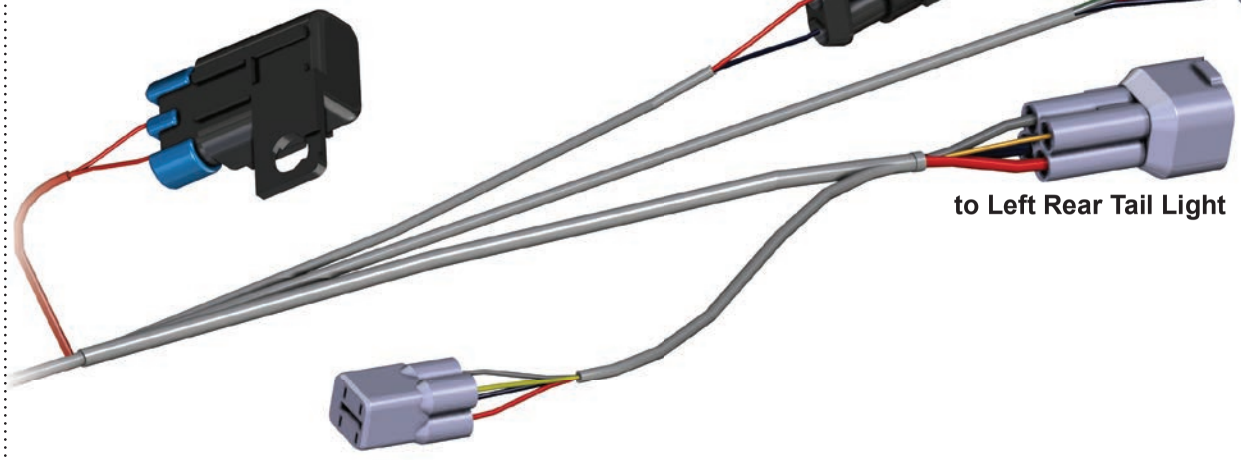

to Left Rear Tail Light

to Left Rear Tail Light

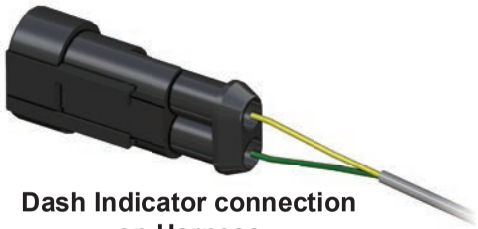

Dash Indicator connection
on Harness

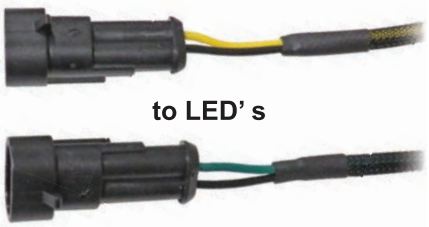

to LED' s

green and black wires = right
yellow and black wires = left

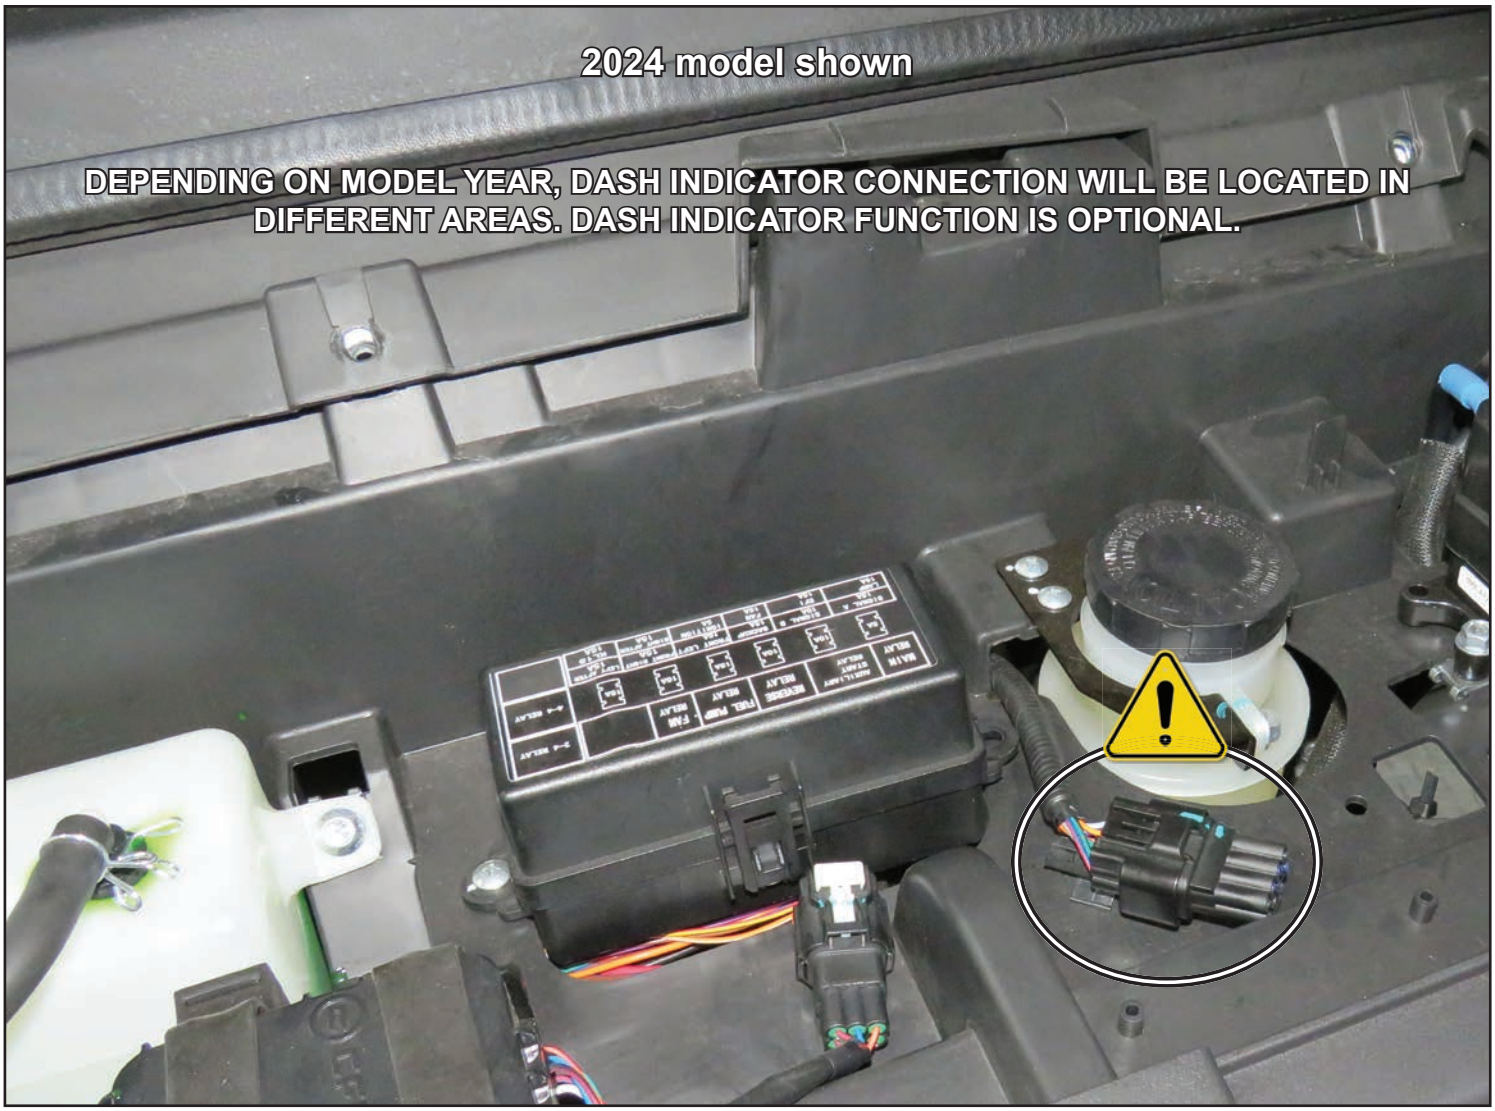
2024 model shown
DEPENDING ON MODEL YEAR, DASH INDICATOR CONNECTION WILL BE LOCATED IN DIFFERENT AREAS. DASH INDICATOR FUNCTION IS OPTIONAL.


2021 model shown
DASH INDICATOR CONNECTION LOCATED BEHIND GAUGE POD. DASH INDICATOR FUNCTION IS OPTIONAL.

Removal

- Remove driver side Wheel.



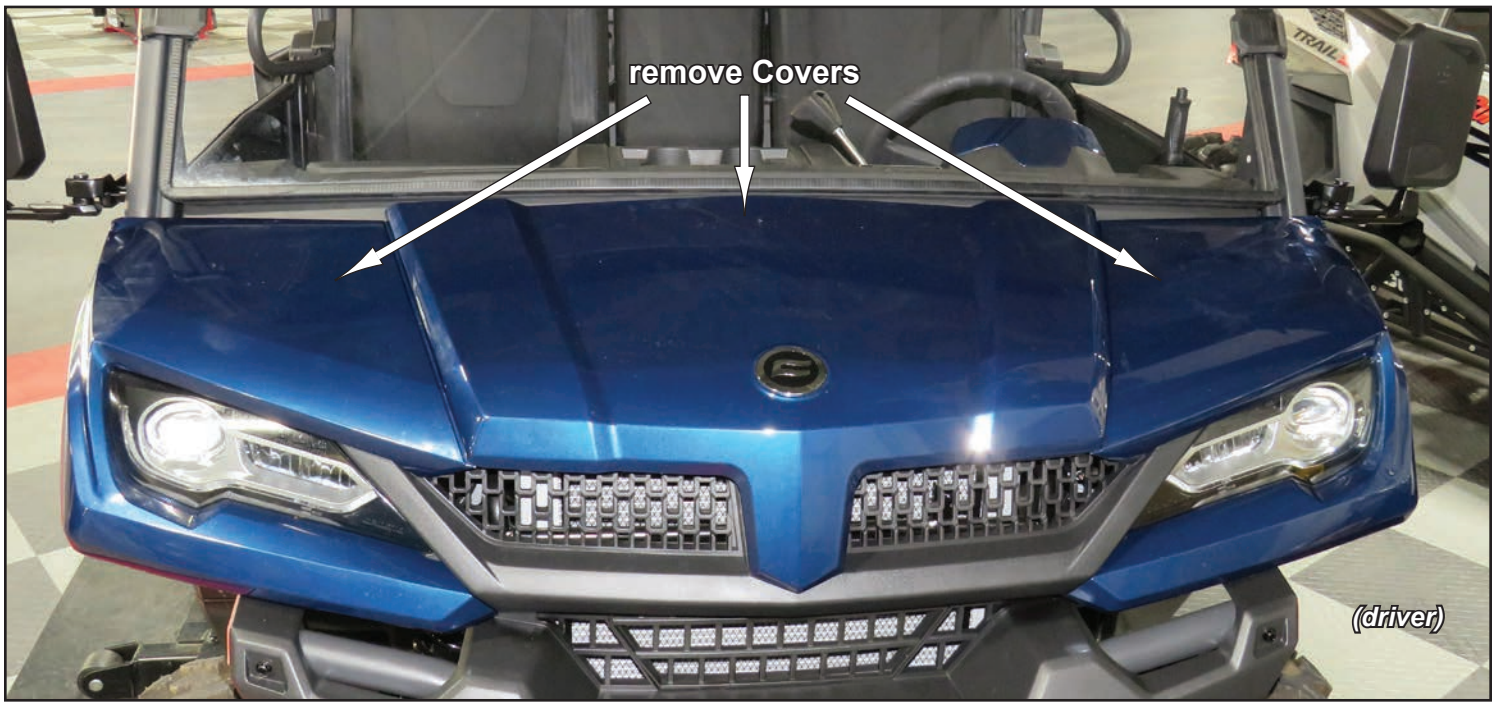

Removal continued

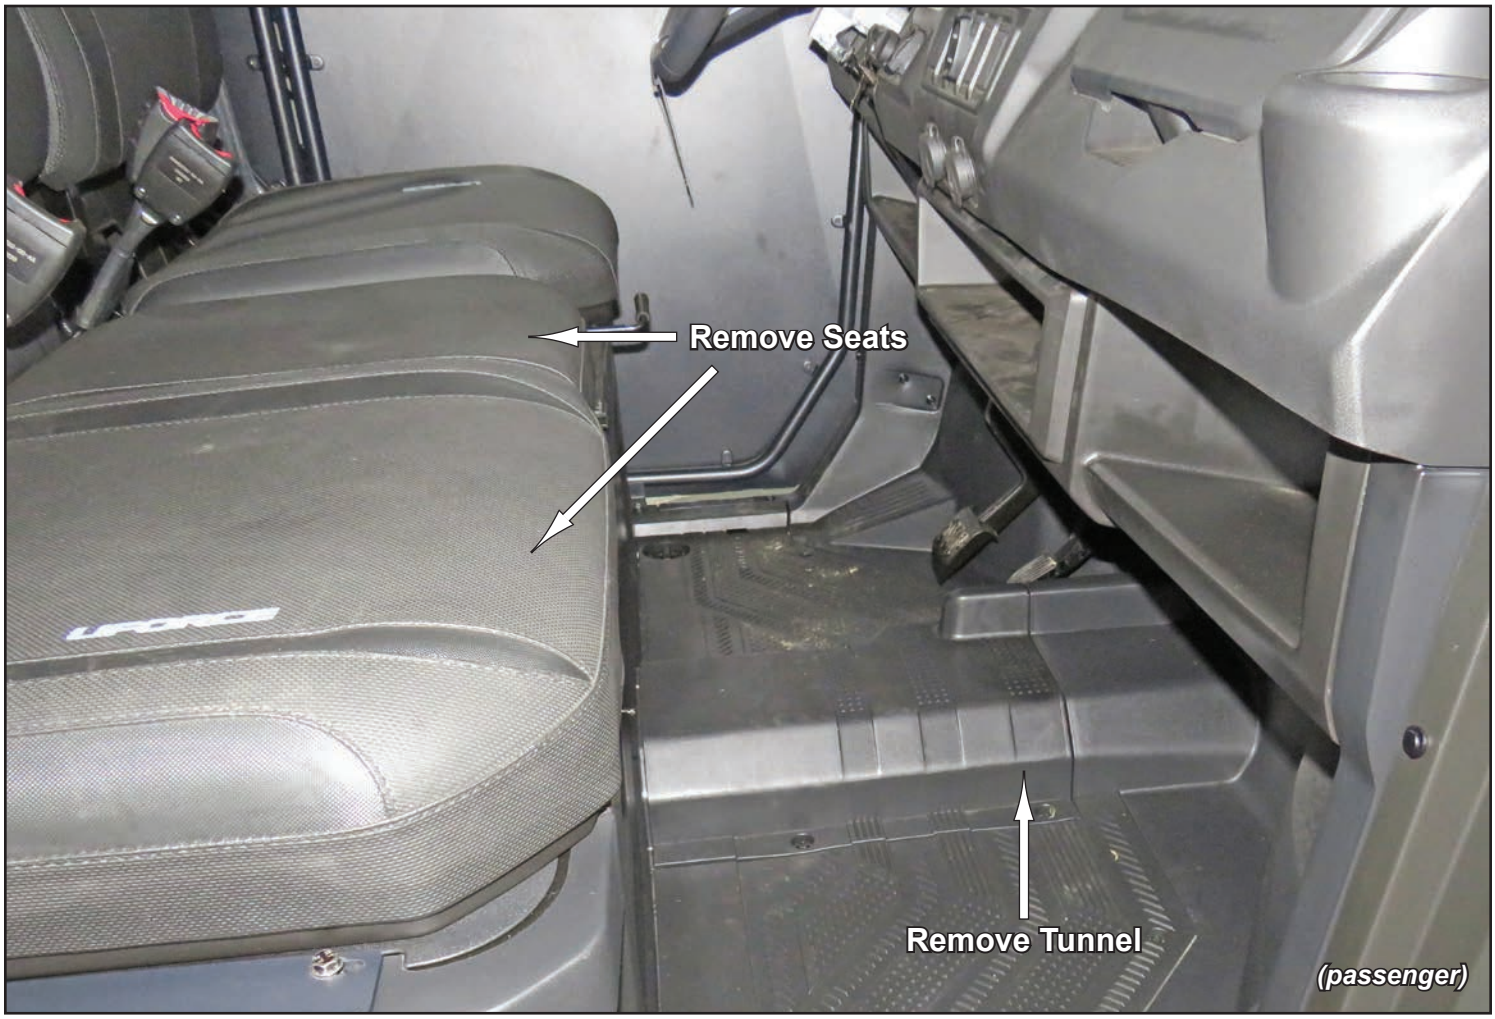



Reinstall components after installation has been completed.

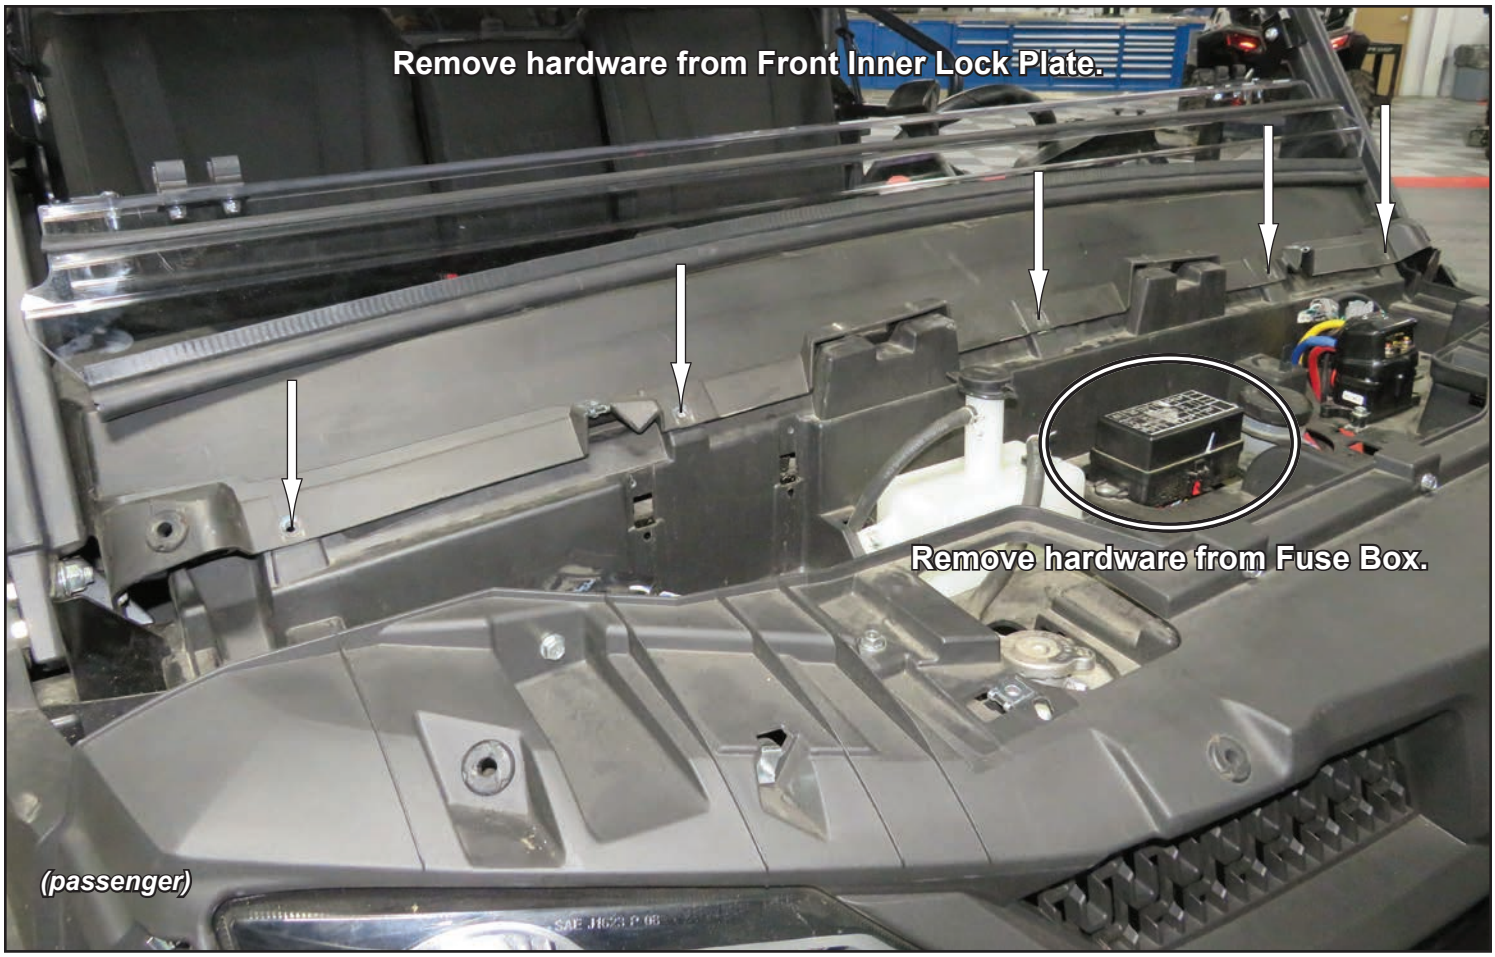

Reinstall hardware after installation has been completed.

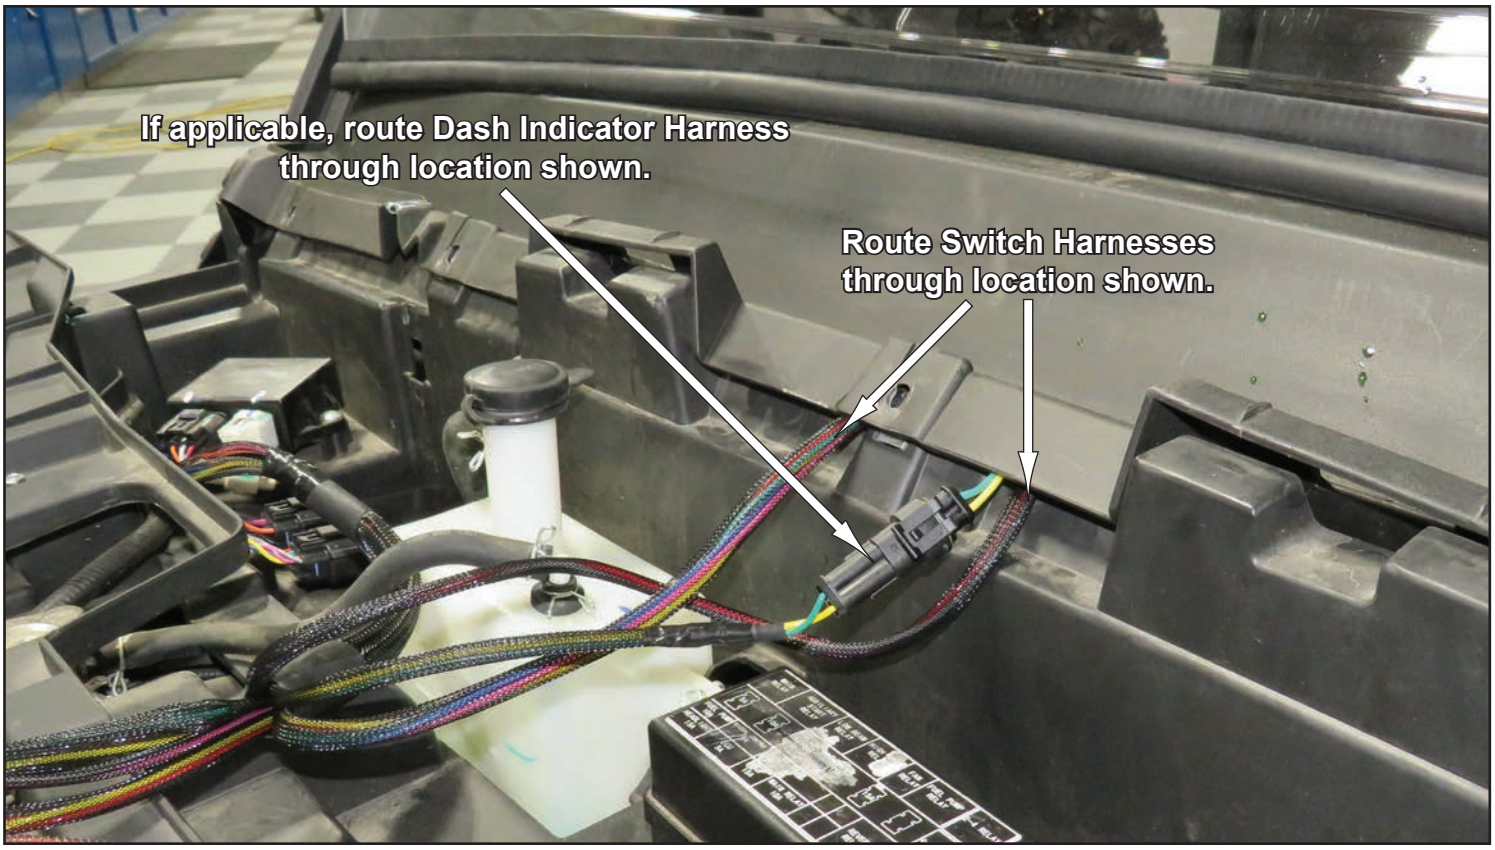
If applicable, route Dash Indicator Harness through location shown.
Route Switch Harnesses through location shown.

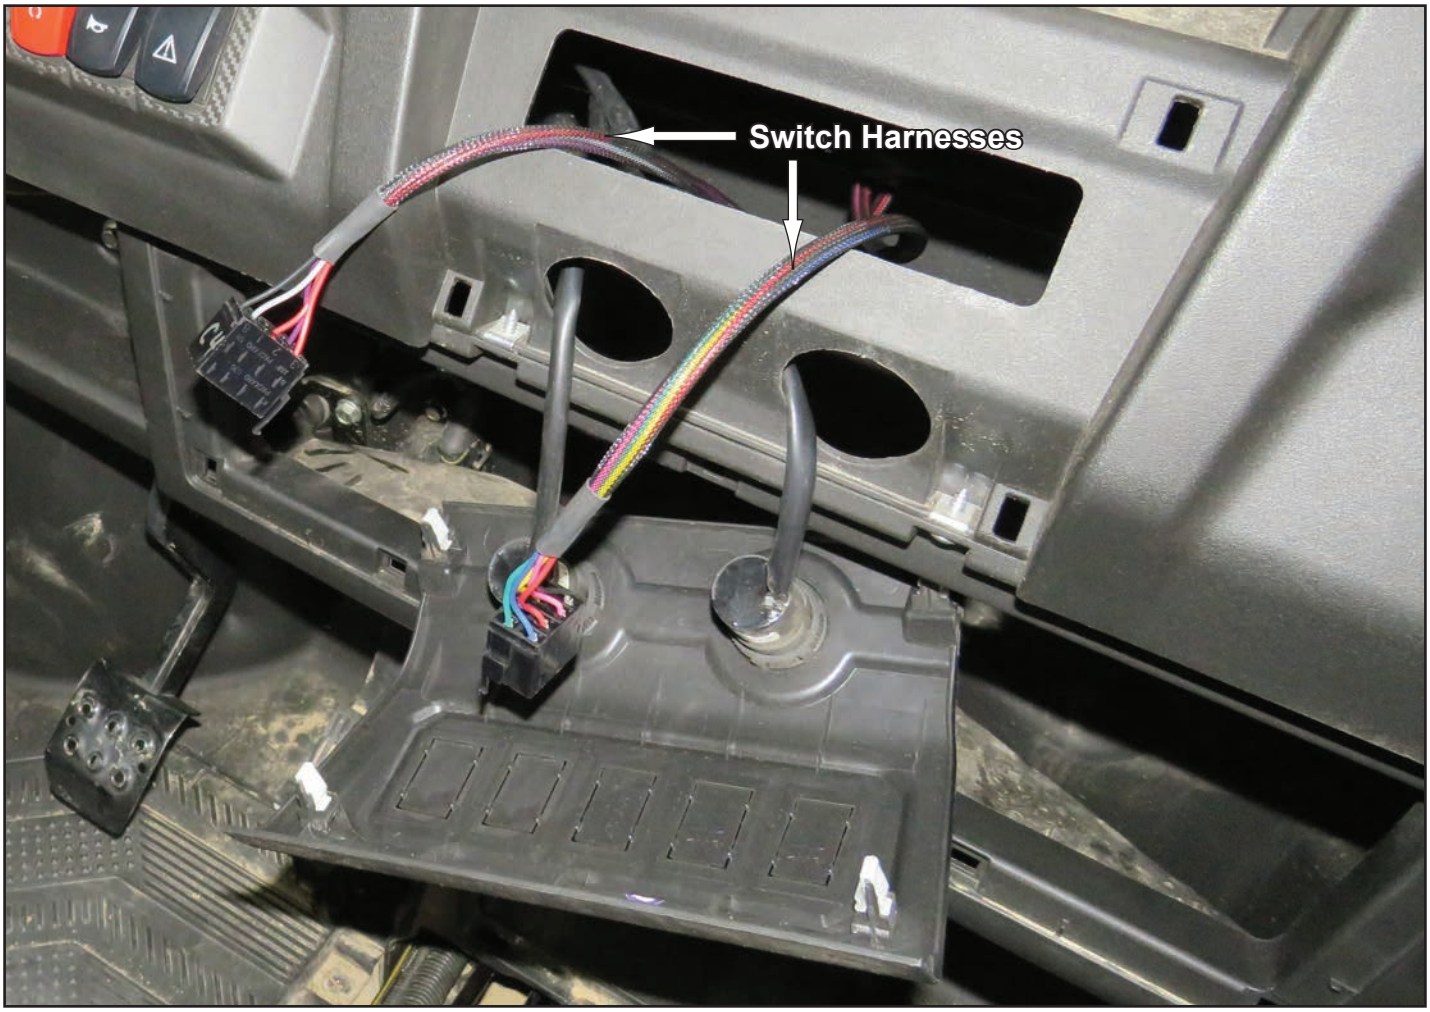
Switch Harnesses

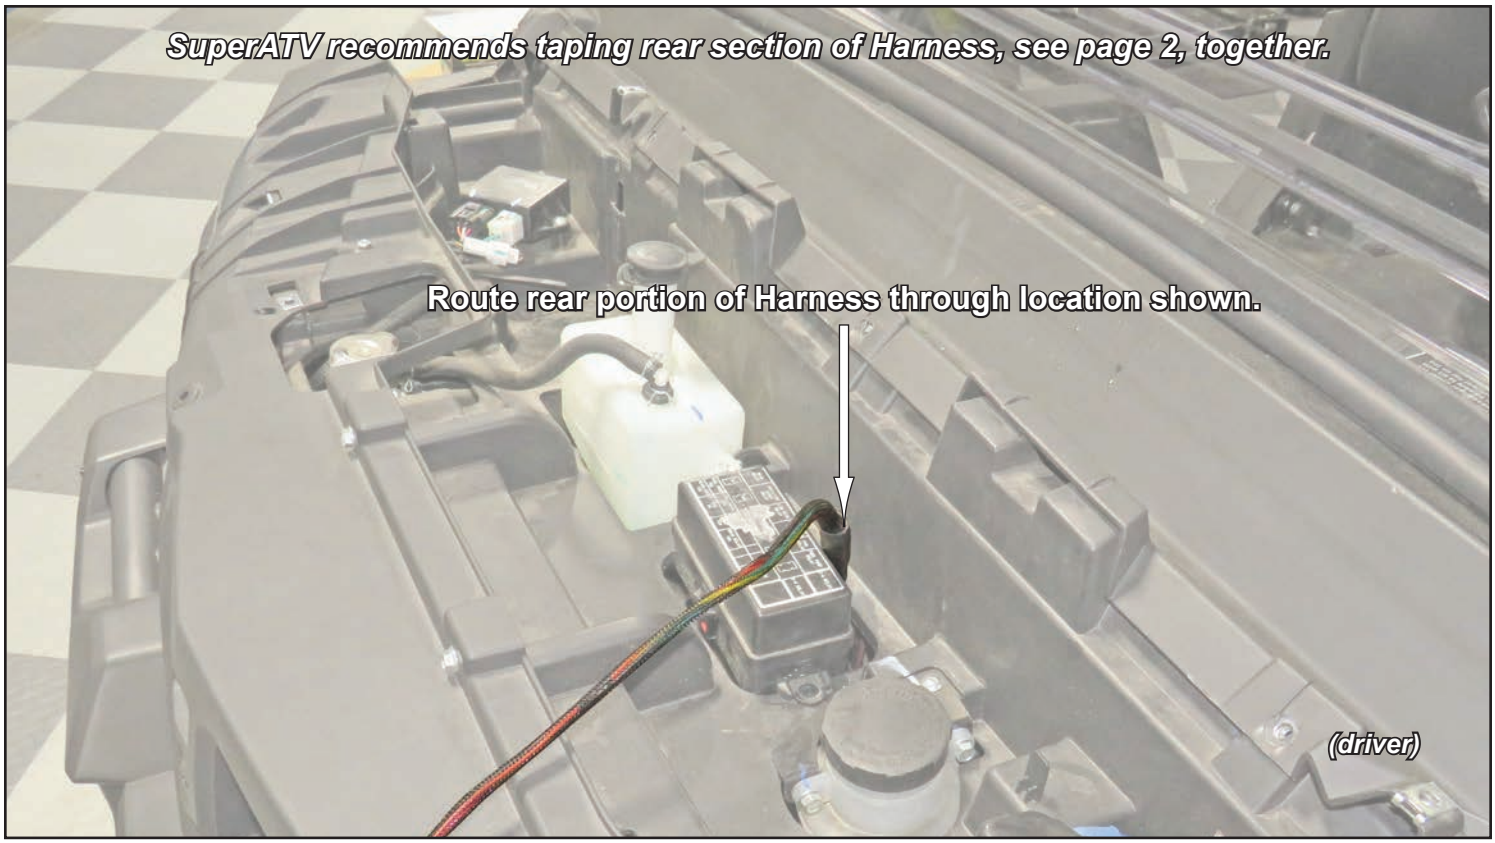
SuperATV recommends taping rear section of Harness, see page 2, together.
Route rear portion of Harness through location shown.
(driver)

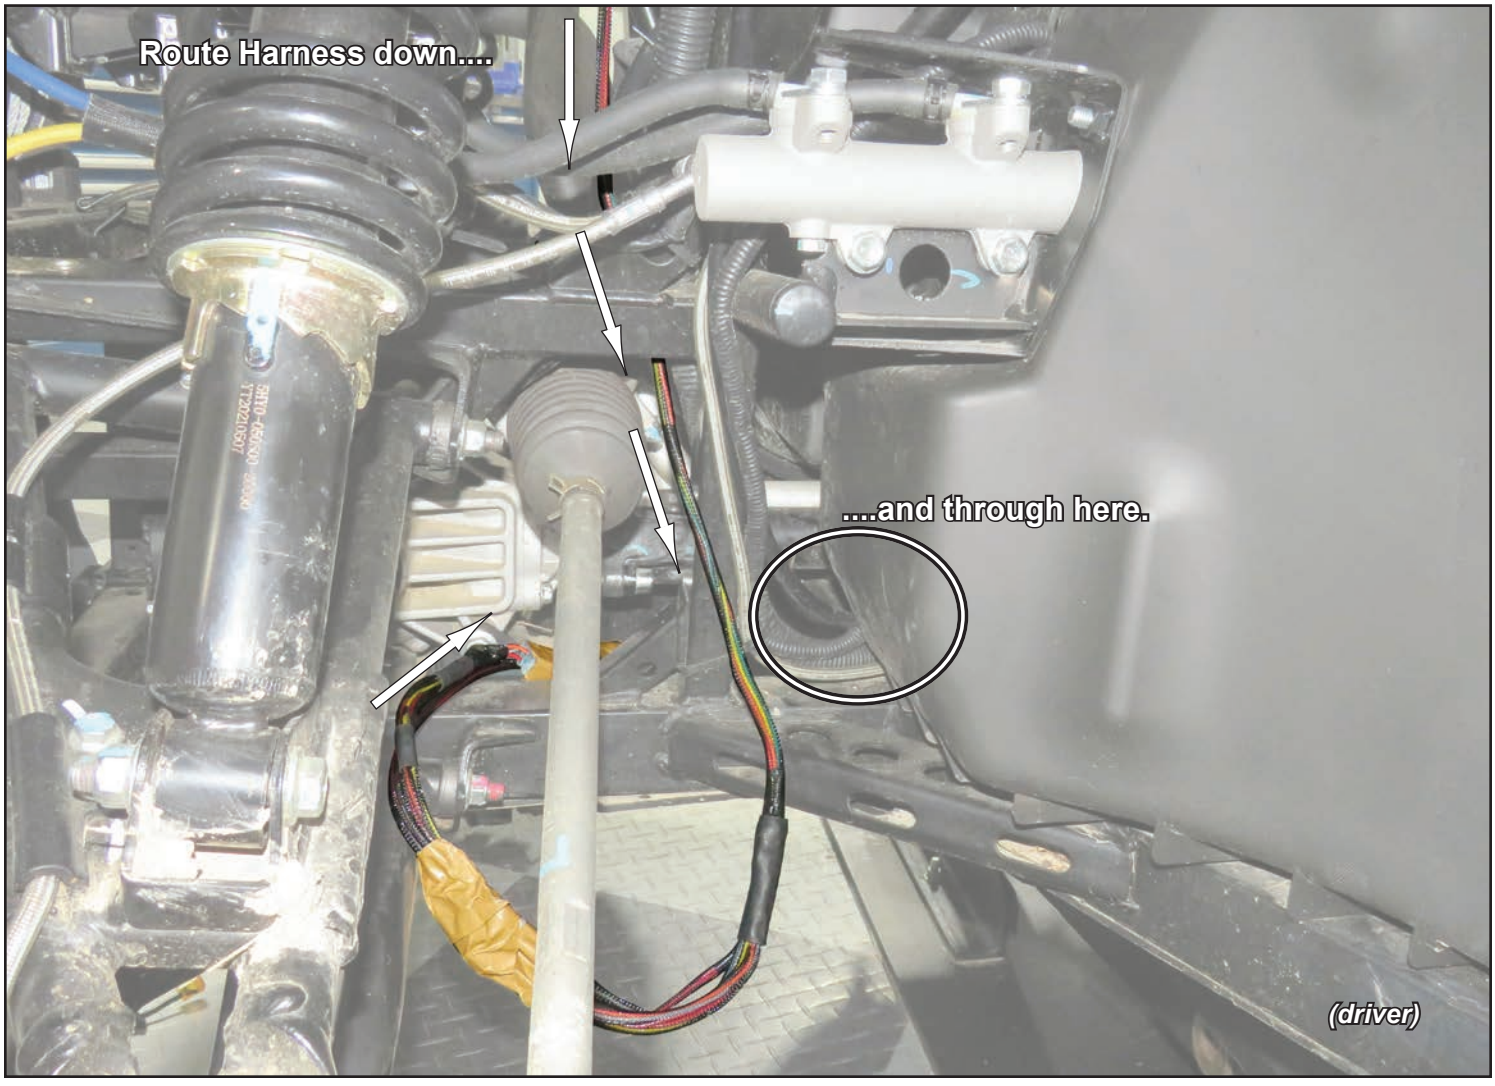
Route Harness down....
....and through here.
(driver)

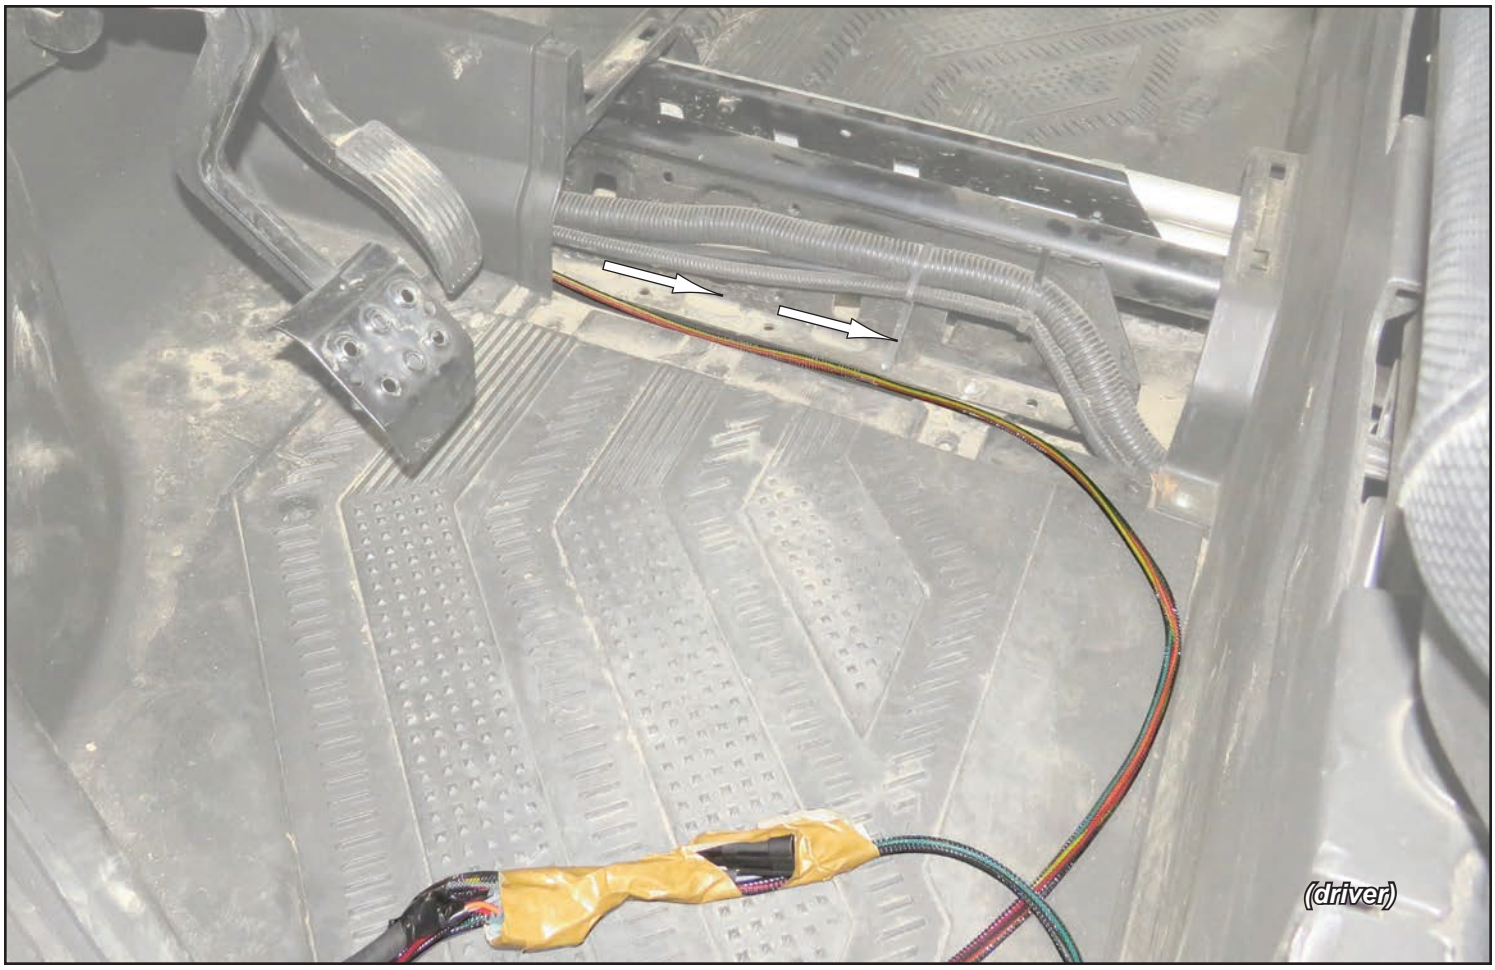

Route Harness through Tunnel.

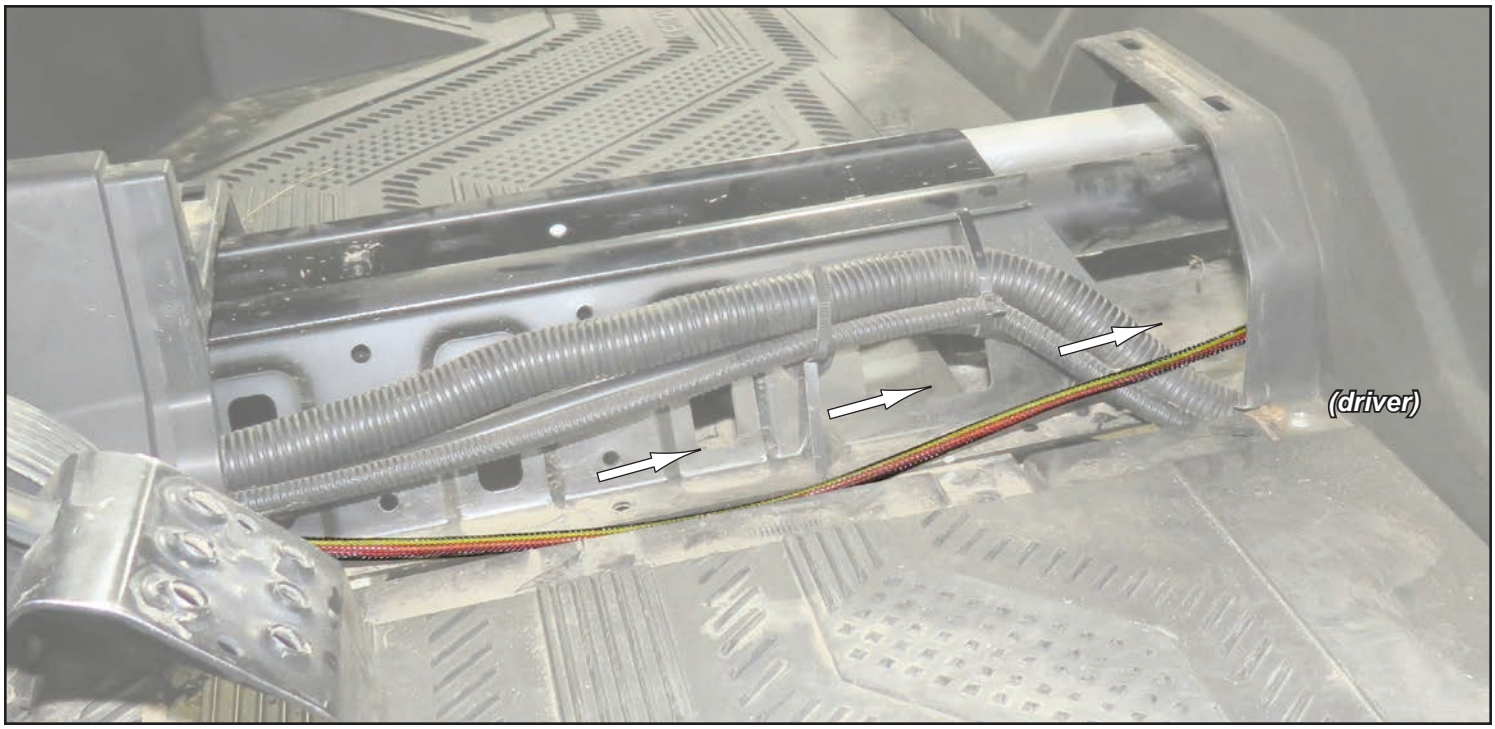

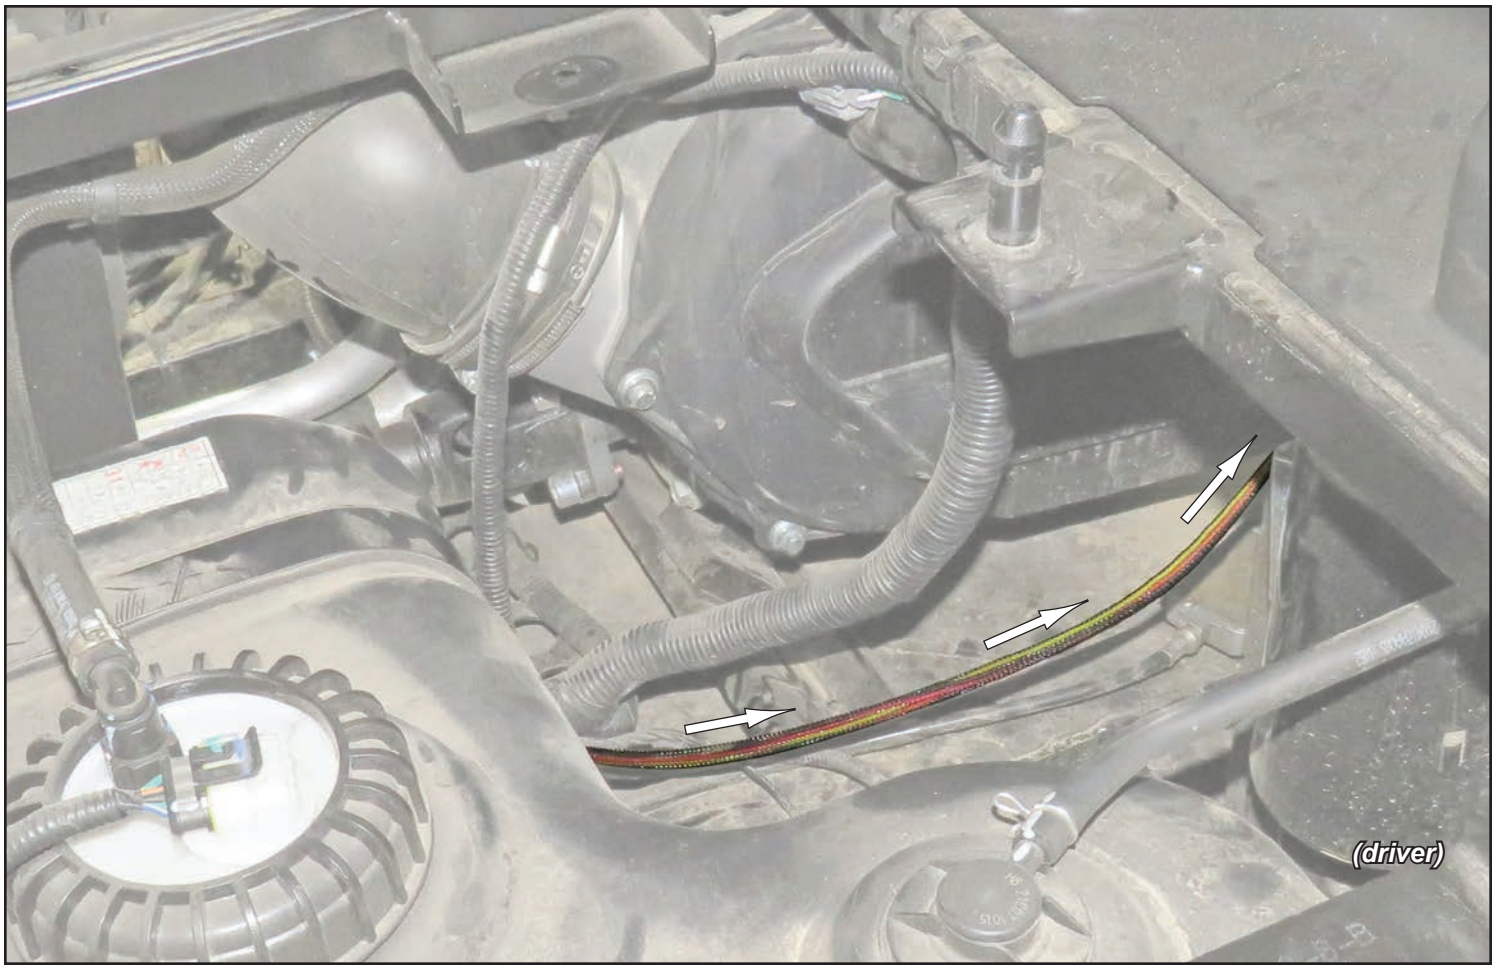

Route Harness up and into rear section of machine.

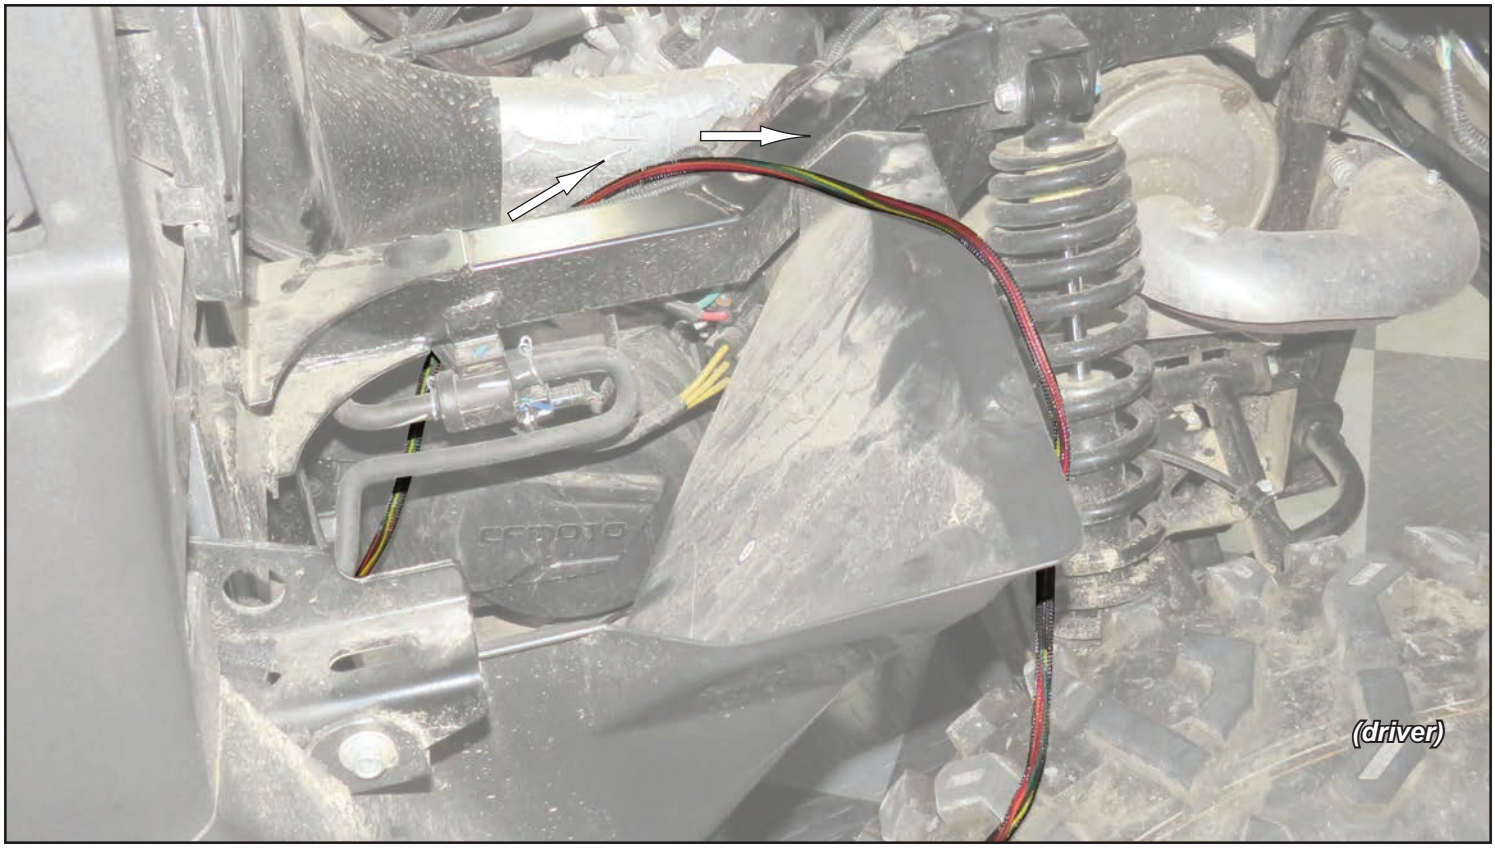

If applicable, remove tape from Harness.

Rear



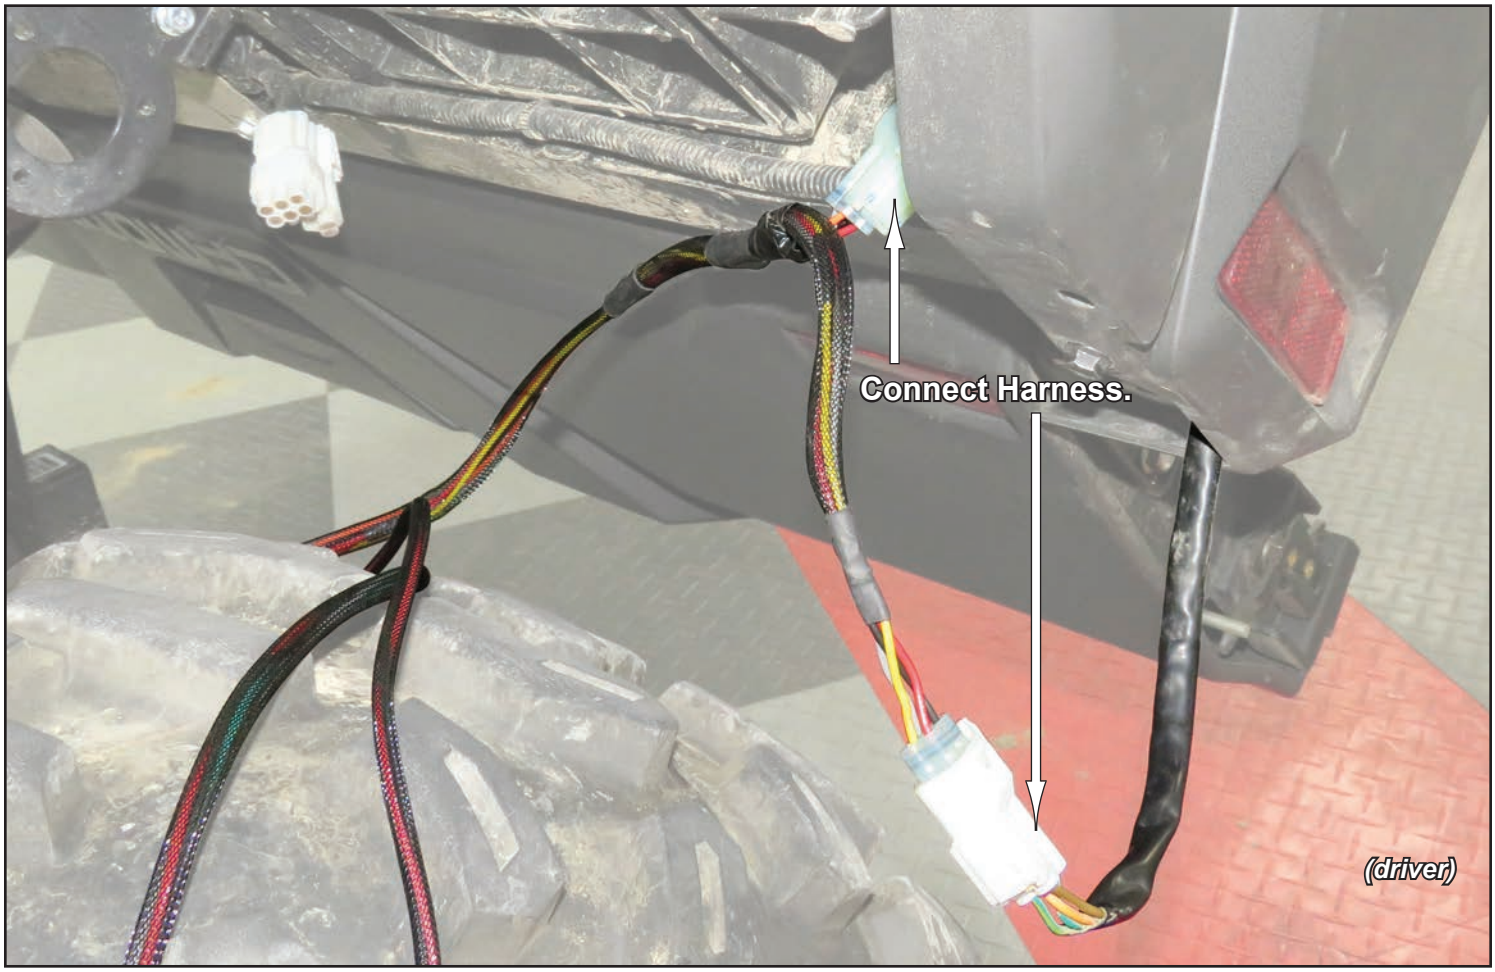

Rear continued

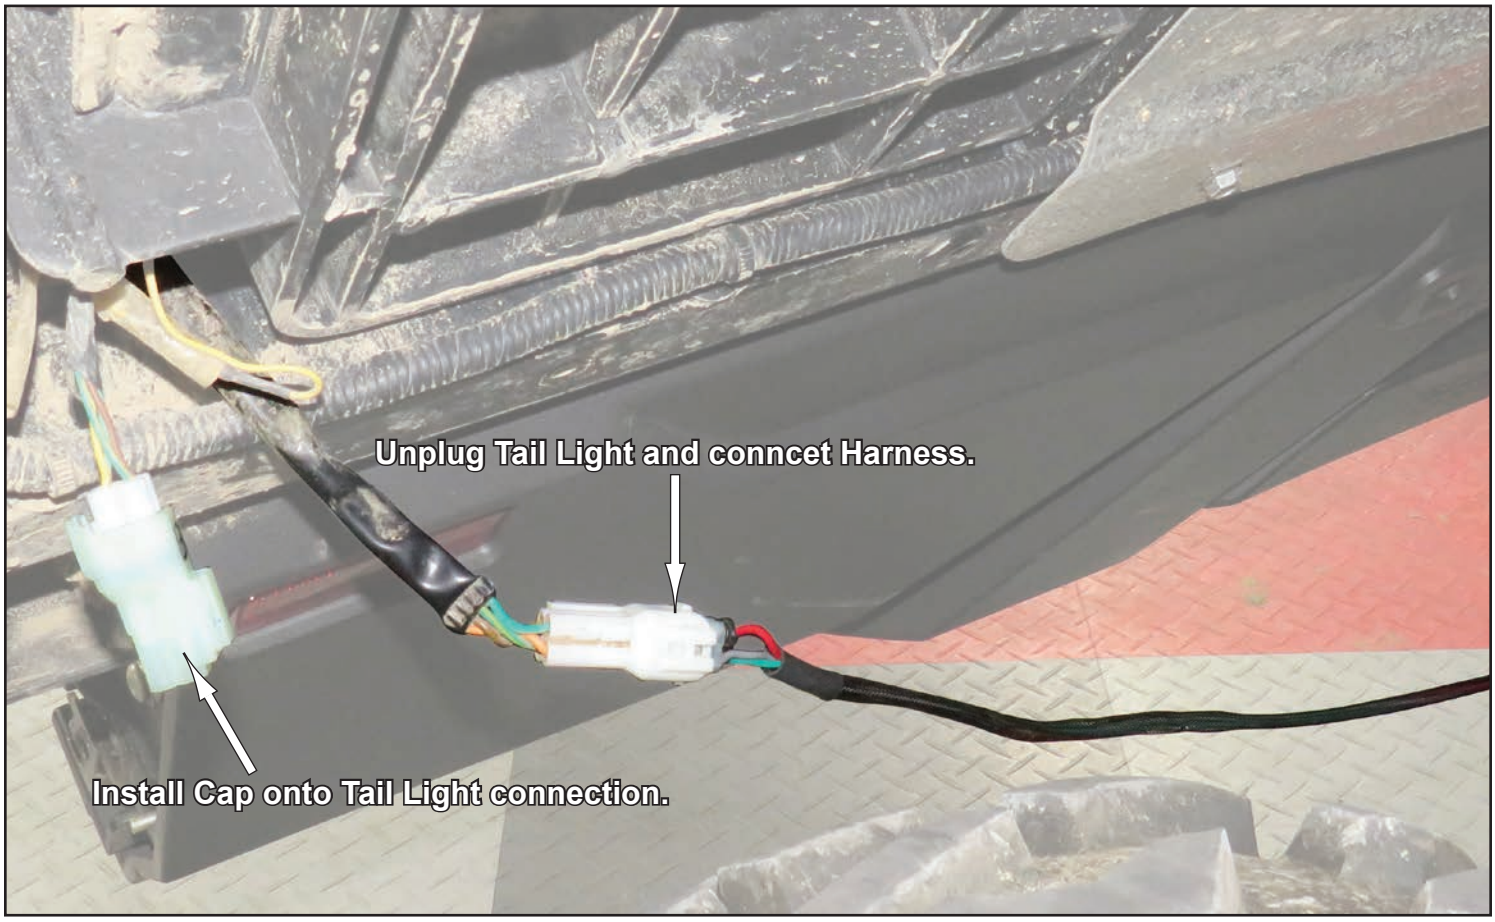



- Plug in Harness and secure ECU to Firewall with hardware shown.

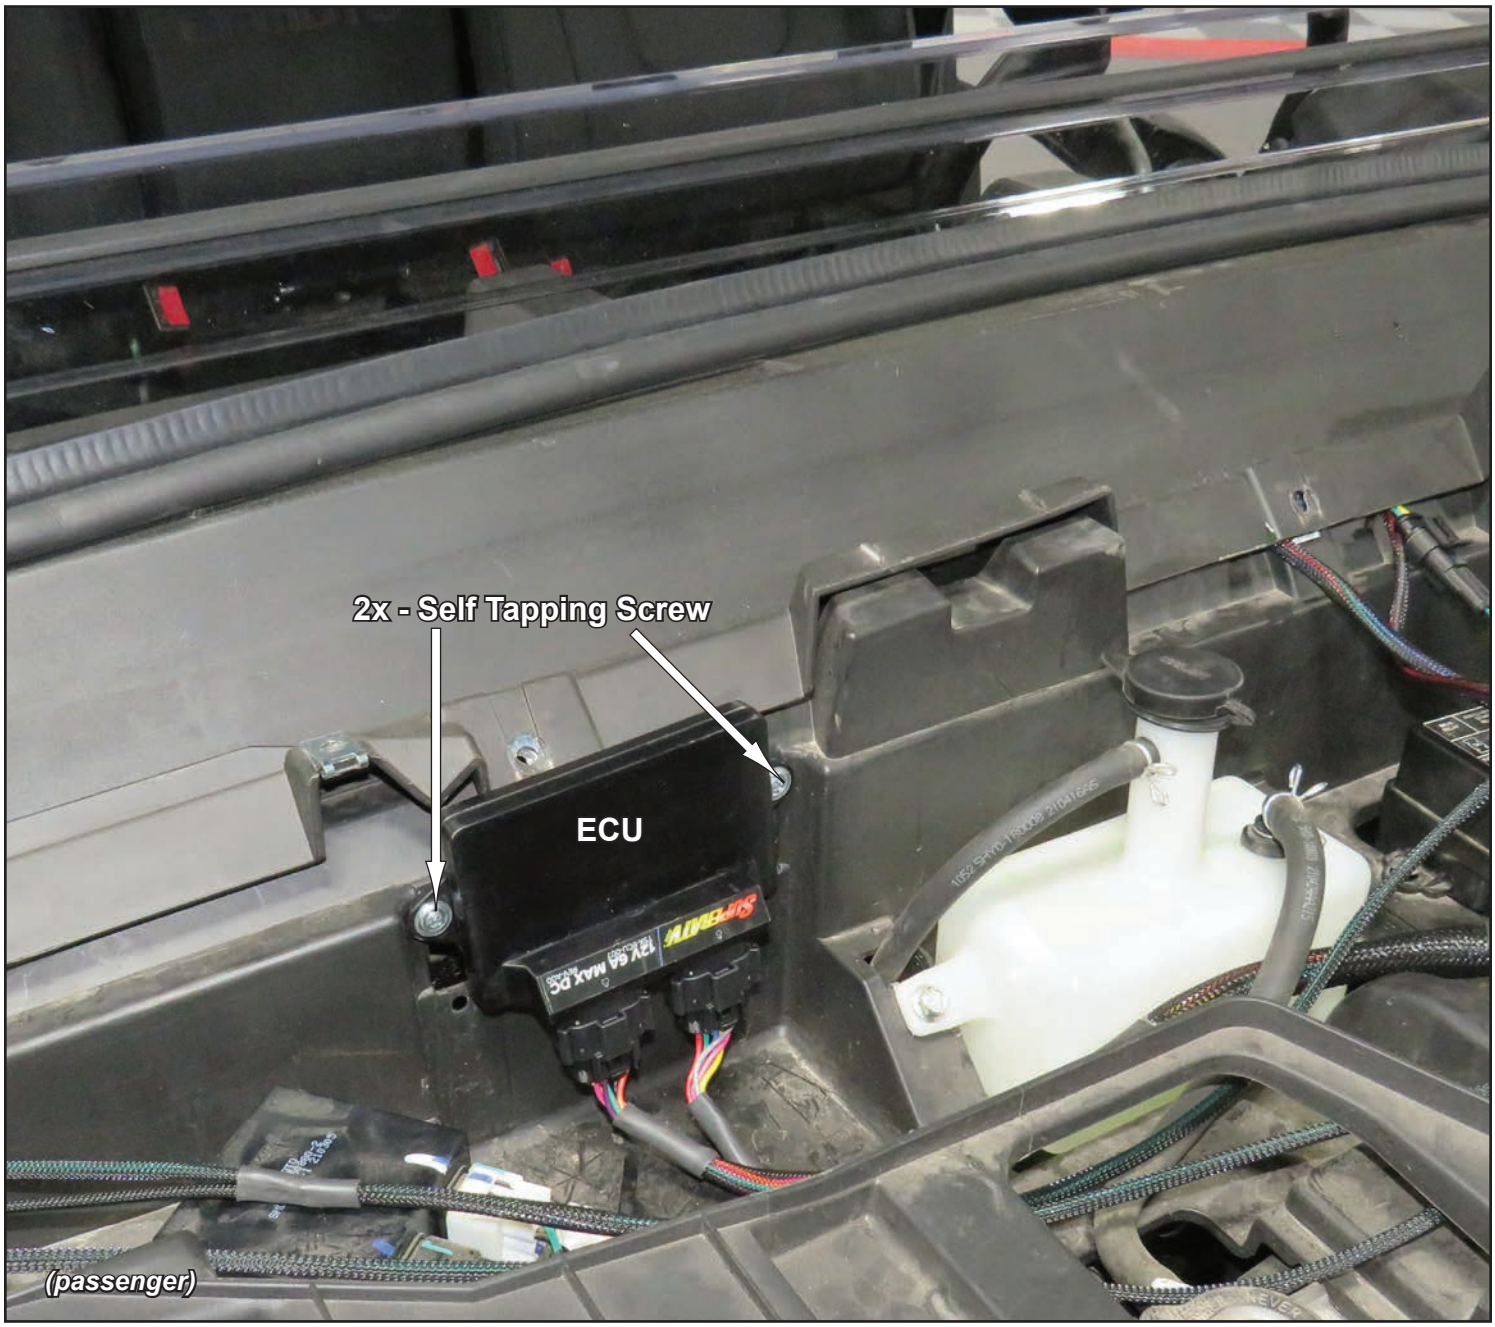

Before drilling any holes, check behind area to be drilled for any interference.

LED Signals:

- User may install in locations different than shown.
- Illustration is SuperATV's choice.
- Drill a Ø3/4" hole in body and install LED Signal. Repeat for remaining LED Signals.
- Plug LED Signals into corresponding inputs on Harness.
- Secure all Wires as needed.

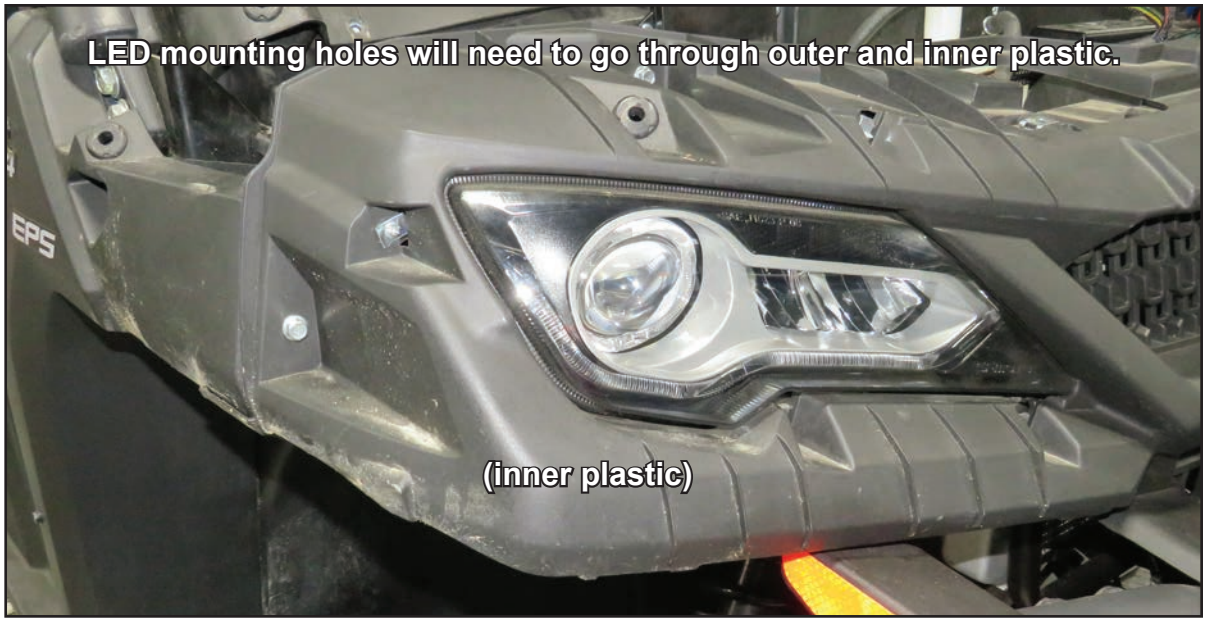





If Light is hard to insert separate as shown.

- Separate LED from Gasket.
- Install Gasket into hole.
- Install LED into Gasket.



Horn:

- User may install Horn in location different than shown.
- Illustration is SuperATV's choice.



- Connect Harness to Horn.
- Secure all Wires as needed.

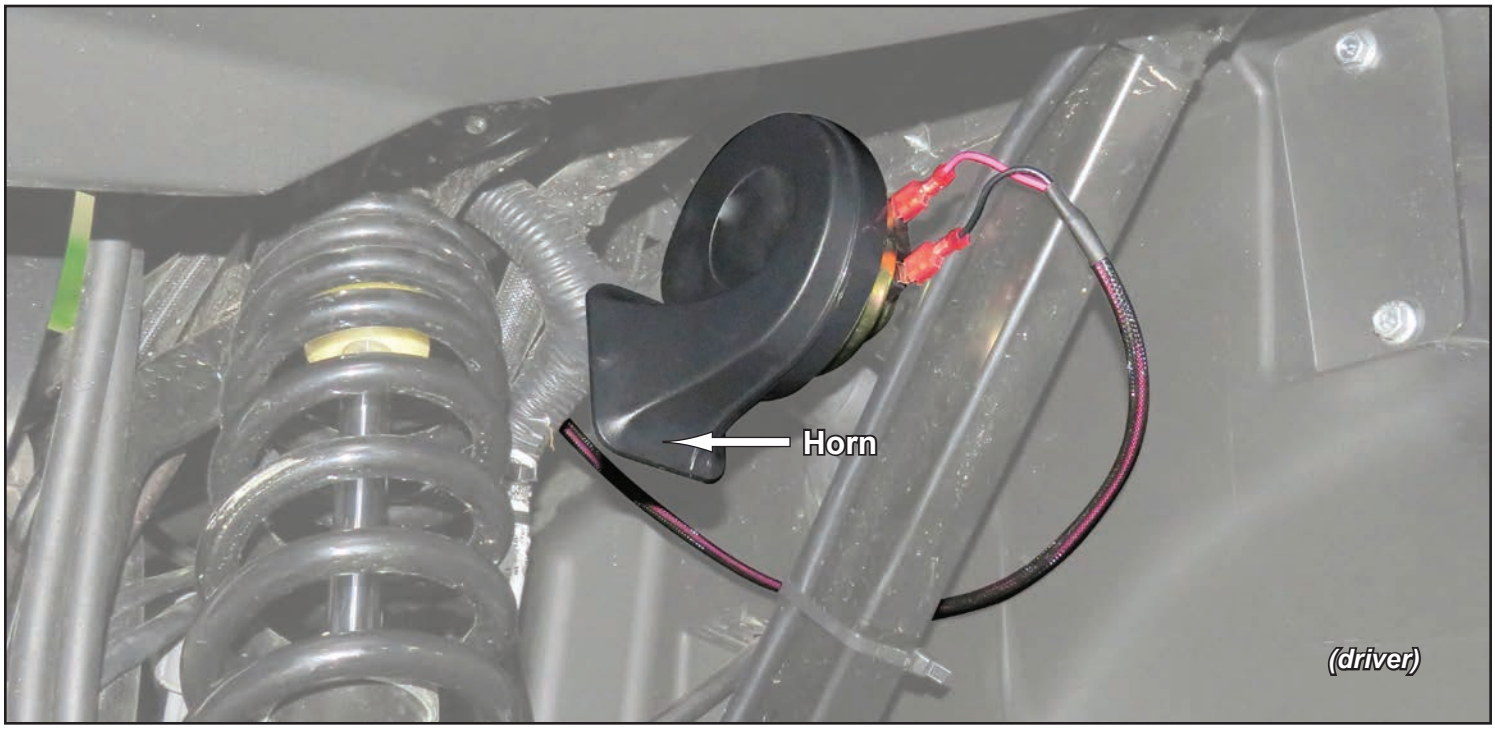

SuperATV recommends testing Switches before permanently mounting.

- Connect Harnesses to Switches.
- Secure Switches.





Indicator Light installation (optional):



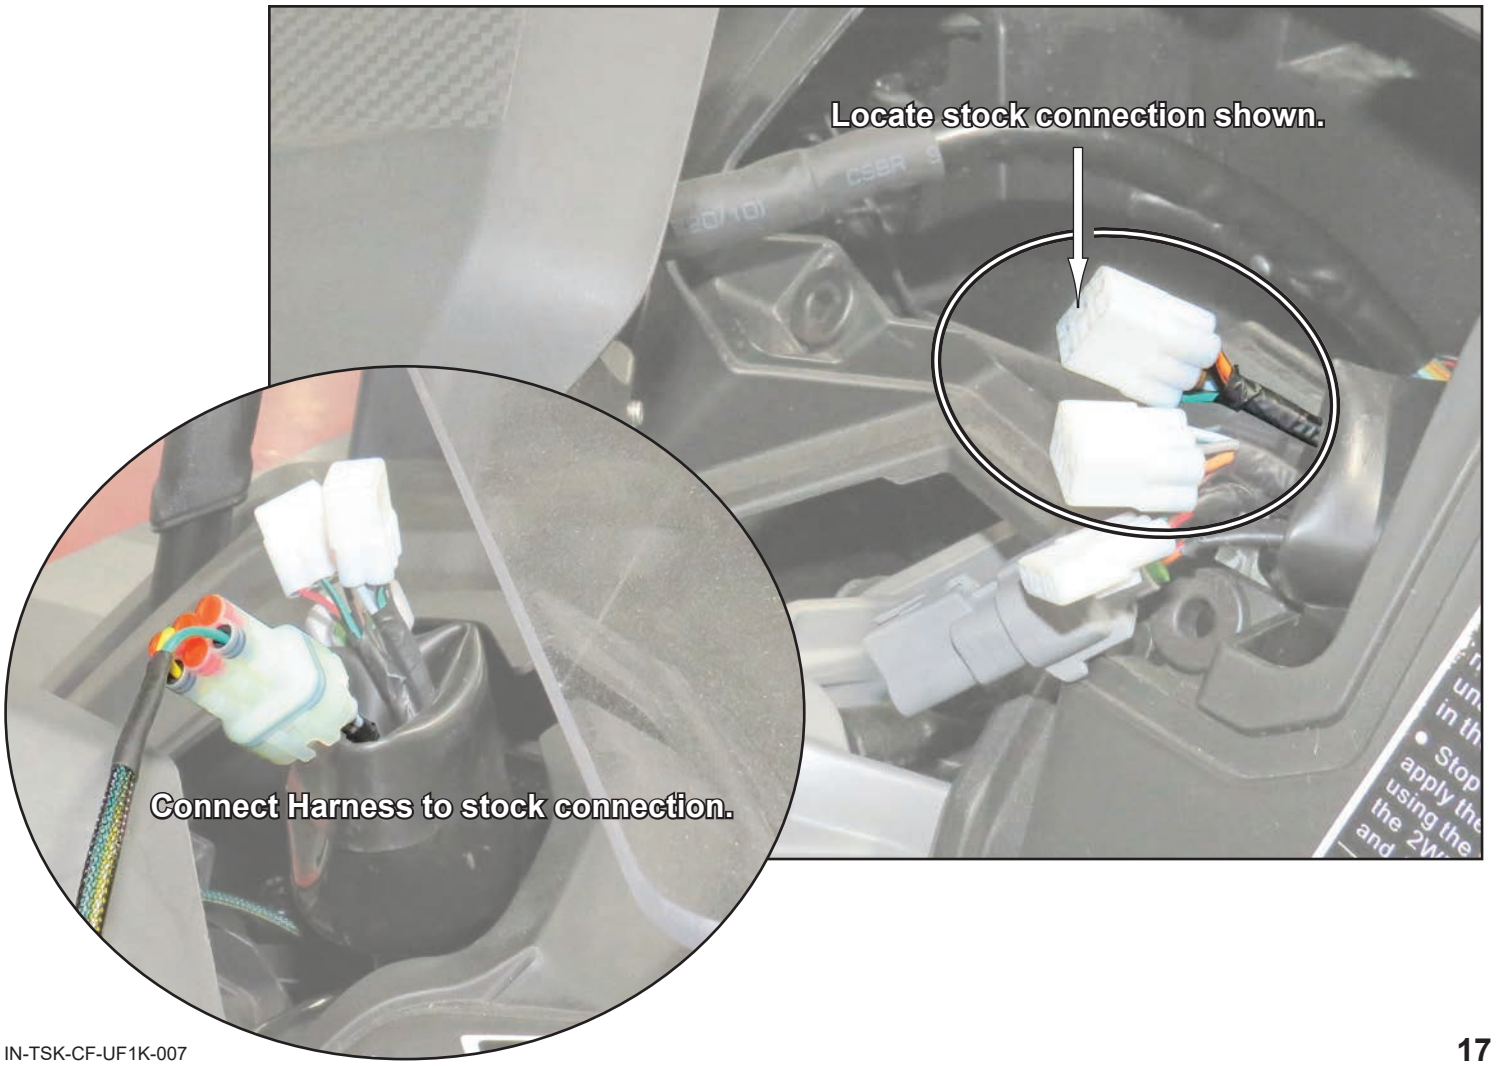

Indicator Light installation continued (optional):



CUSTOMER NOTIFICATION AND DISCLAIMER LIABILITY

This product is a modification for utility task vehicles and all terrain vehicles. Use this product at your own risk.

Warranty and Liability Limitations. The Buyer hereby assumes all risks associated with the use and/or installation of this product. Buyer waives all liability claims against SuperATV® of any kind or nature, including, but not limited to, liability for penalties, fines, property damage, personal injury or death, to the fullest extent permitted by law. Buyer acknowledges and agrees that SuperATV® is not liable for any direct, indirect, incidental, consequential or special damages, including but not limited to, damage, loss of life, loss of property or equipment, loss of profits or revenue, injury, or claims from any individual or entity arising from the use of this product.

The warranty for this product, if any, may give you (“Buyer”) specific legal rights, and Buyer may also have other rights which may vary from state to state. The installation of this product may void or otherwise adversely affect your factory warranty.

Consult your vehicle warranty before using this Product. Under no circumstances will SuperATV® be liable for the voidance of the Buyer’s vehicle warranty. Buyer assumes all risk and responsibility if a manufacturer and/or dealer voids the Buyer’s vehicle warranty due to use of this Product.

Safety and Laws. Operate your vehicle at all times in a safe manner. You must abide by all local, state, and federal laws, including but not limited to vehicle safety, traffic laws, and ordinances. It is your responsibility to know the laws and how they apply to you. The installation of this product may violate certain local, state, and federal laws. Be advised that laws vary depending on town, city, county, state, etc. Use of this product on public streets, roads, or highways may be in violation law. The Buyer is solely and exclusively legally and personally responsible for any violation of the law by the installation or use of this product. In no case will SuperATV® be held liable if Buyer violates the law or uses the product in an unsafe manner.

The Buyer is responsible to fully understand the capability and limitations of his/her vehicle according to manufacturer specifications, warnings and instructions and agrees to hold SuperATV® harmless from any damage resulting from failure to adhere to such specifications, warnings and/ or instructions. The Buyer is also responsible to obey all applicable federal, state, and local laws when operating his/her vehicle while using this product, and the Buyer agrees to hold SuperATV® harmless from any violation thereof.

Installation. The installation of this product on your vehicle indicates that you have had the opportunity to inquire about applicable local, state, and federal laws and ordinances and that you have read and understand, and accept all of the terms of, this Disclaimer.

SuperATV® shall not be responsible for the proper installation, use, and service of this product. Rather, the Buyer shall be solely responsible for the installation of the product and any damage that may be done to the vehicle or vehicle components as a result of modifications made by the Buyer.

Accessory to Turn Signal Kit Wiring

Left Turn Signal Harness shown in illustrations.

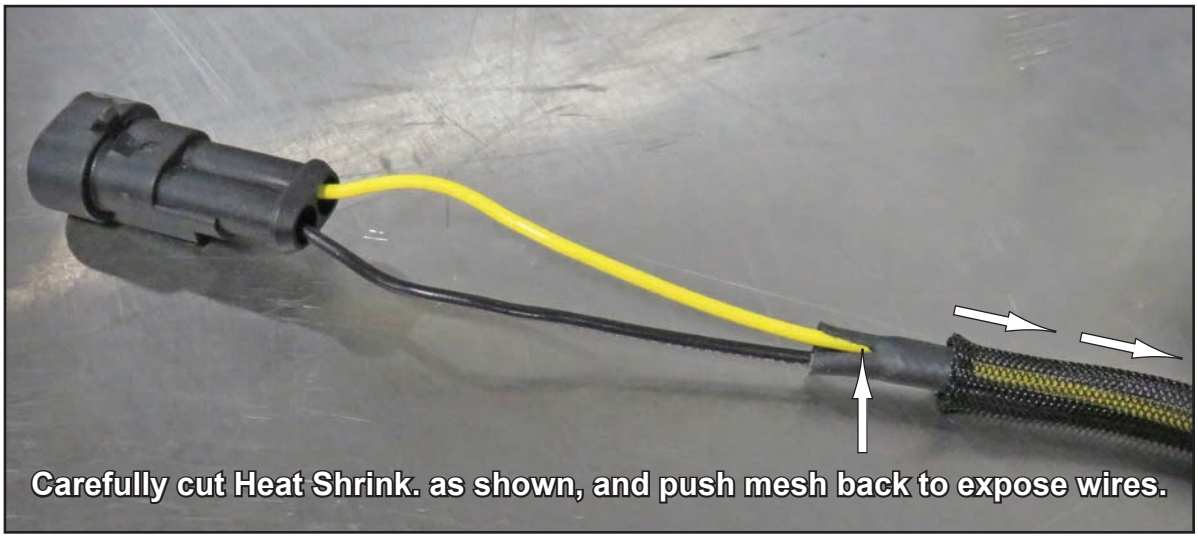

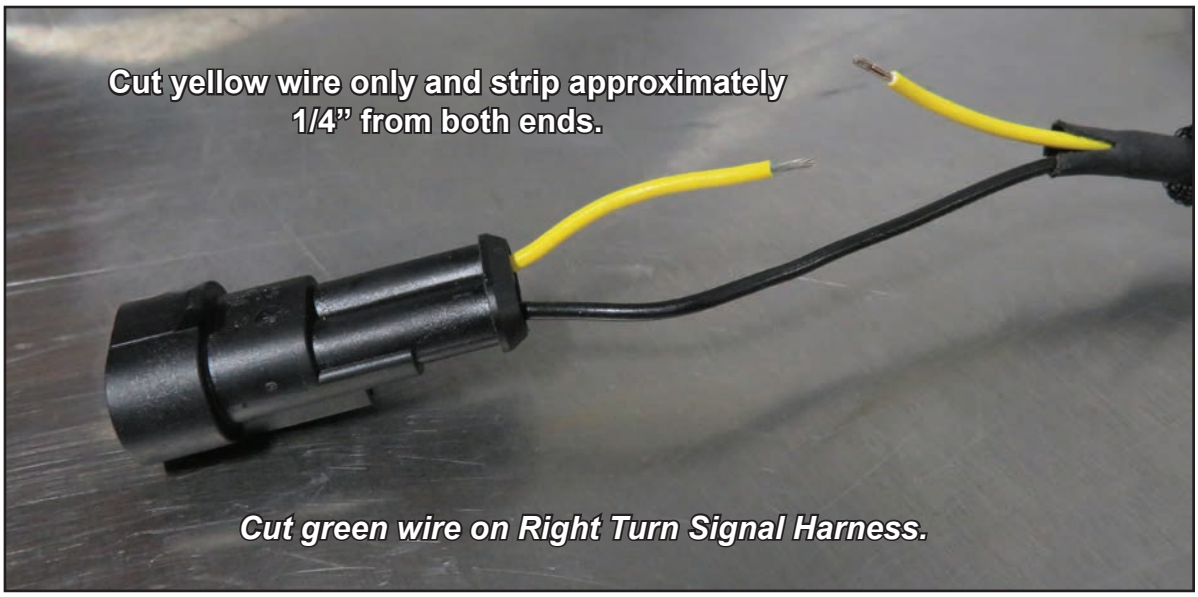

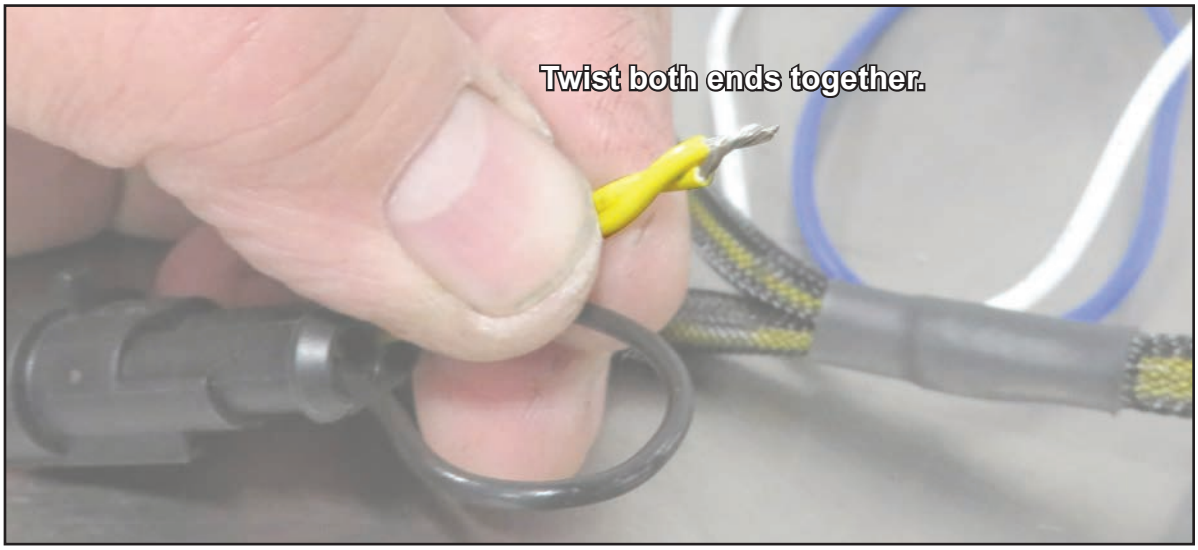

Accessory to Turn Signal Kit Wiring continued

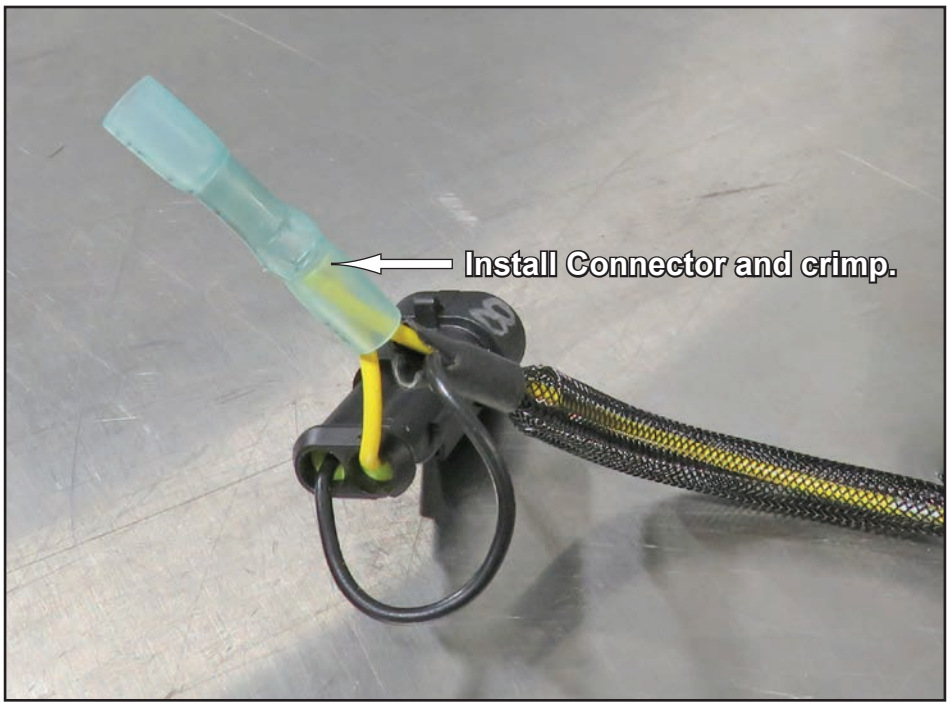

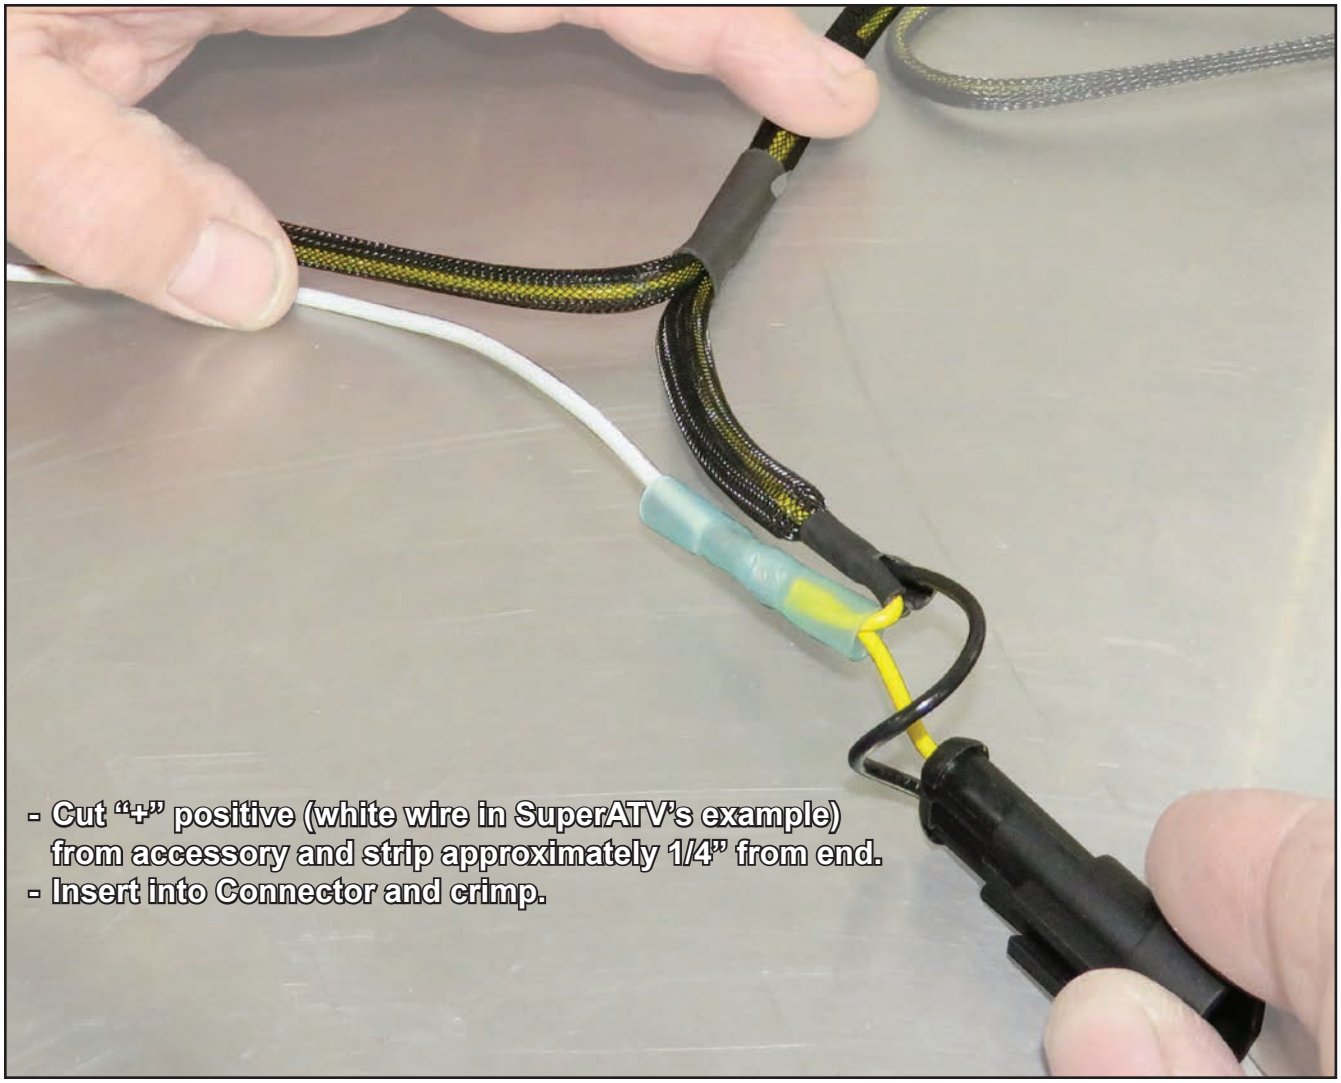

SuperATV recommends using a handheld mini torch, or lighter, to activate heat shrink on Connector.